

07/C/06

INSTRUCTION MANUAL

REGULATED POWER SUPPLIES


MODEL LM
B PACKAGE



LAMBDA

LAMBDA ELECTRONICS CORP.-MELVILLE, L. I., N. Y.

INSTRUCTION MANUAL
FOR
REGULATED POWER SUPPLIES

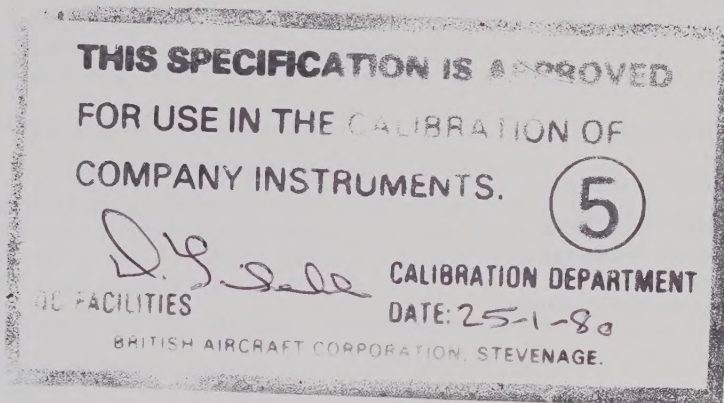

MODEL LM
B PACKAGE

THIS MANUAL APPLIES TO UNITS
BEARING SERIAL NO. PREFIXES A-D

This manual provides instructions intended for the operation of Lambda power supplies, and is not to be reproduced without the written consent of Lambda Electronics Corp.

LAMBDA ELECTRONICS CORP.

MELVILLE, L.I., N. Y.

MAIN PLANT TELEPHONE: 516 MYrtle 4-4200

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
SPECIFICATIONS AND FEATURES	1
Mounting	2
Accessories	2
Model Options	3
THEORY OF OPERATION	4
General	4
Functional Description	4
OPERATING INSTRUCTIONS	6
Basic Mode of Operation	6
Mounting	6
Connections for Operation	6
MAINTENANCE	8
General	8
Trouble Analysis	8
Checking Transistors and Capacitors	8
Printed Circuit Board Maintenance Techniques	8
Trouble Chart	9
Performance Check	10
Adjustment of Calibration Control R17	10
SERVICE	12
PARTS ORDERING	12
PARTS LIST	B-1

SPECIFICATIONS AND FEATURES

The following specifications apply for all Lambda B package LM power supplies. Specification exceptions noted here relate to models incorporating model option "Y" and/or "T". Performance specifications do not change for models with suffix "R", e.g., LM-B2-R unless the models also include model options "Y" and/or "T" or "V" e.g., LM-B2-YR; for these models the appropriate specification exceptions also apply

NOTE: Specifications in *italics* apply only for Lambda models with a "Y" suffix, e.g., LM-B2-Y. AC INPUT specification with an asterisk*, applies only for Lambda models with a "T" or "V" suffix, e.g., LM-B2-YT.

DC OUTPUT--Voltage regulated for line and load

Voltage Range....For voltage range see table I of pertinent model group

Multi-Current Ratings....Current ratings specified for each maximum ambient temperature apply over entire output voltage range, with input frequency 55-65 cps. For input frequencies 45-55 at 105-132 VAC, 200-250 VAC, or 205-265 VAC, derate maximum current ratings 10% at all ambient temperatures.

For input frequencies 360-440 cps, consult factory for current ratings.

For maximum current ratings at each ambient temperature see table I of pertinent model group

REGULATED VOLTAGE OUTPUT

Regulation (line)... Less than 0.05 percent plus 4.0 millivolts for input variations from 105-132 or 132-105 volts AC

... *Less than 0.01 percent plus 1.0 millivolt for input variations from 105-132 or 132-105 volts AC*

Regulation (load)... Less than 0.03 percent plus 3.0 millivolts for load variations from 0 to full load or full load to 0

... *Less than 0.02 percent plus 2.0 millivolts for load variations from 0 to full load or full load to 0*

Remote Programming

External Resistor... Nominal 200 ohms/volt output

Programming Voltage... One-to-one voltage change

Ripple and Noise... One millivolt rms; 3 millivolts peak-to-peak

... *0.5 millivolt rms; 1.5 millivolts peak-to-peak with 60 cps input*

... *1.0 millivolt rms; 3 millivolts peak-to-peak with 400 cps input*

Temperature Coefficient... Change in output voltage less than 0.03%/°C

... *Change in output voltage less than 0.01%/°C*

AC INPUT--105-132 volts AC at 45-440 cps; 80 watts+

+ With output loaded to full 40°C rating and input voltage 132 volts at 55-65 cps.

*... 200-250 volts AC at 45-440 cps ("T" option)

*... 205-265 volts AC at 45-440 cps ("V" option)

When fusing of input power line is planned, use a 2.0 ampere type 3AG "SLO-BLO" fuse.

OVERLOAD PROTECTION

Thermal...Thermostat resets automatically when overtemperature condition is eliminated

Electrical...Within rated voltage range, an automatic electronic current-limiting circuit limits output current to approximately 110 percent of 40°C rated current for protection of load and power supply; for overloads approaching short circuit, both voltage and current decrease until at short circuit, current is approximately 30 percent or less of rated current, except for models LMB-0-7, 0-14, 0-32 and 0-60, where output current remains limited to 110 percent of 40°C rated current at 40°C ambient.

OVERSHOOT--No overshoot of output voltage under conditions of power turn-on, power turn-off, or power failure

INPUT AND OUTPUT CONNECTIONS--Heavy duty terminal block on rear of chassis

OPERATING AMBIENT TEMPERATURE RANGE AND DUTY CYCLE--Continuous duty from -20°C to 71°C ambient with corresponding load current ratings for all modes of operation, and all mounting positions

STORAGE TEMPERATURE-- -55°C to +85°C

CONTROLS

DC output control...Voltage adjust control permits adjustment of DC output voltage via access hole located in nameplate.

REMOTE SENSING--Provision is made for remote sensing to eliminate effect of power output lead resistance on DC regulation.

PHYSICAL DATA

Size 3-3/16" H x 4-15/16" W x 6-1/2"D

Weight 6 lbs. net; 7 lbs. shipping wt.

Finish Grey, FED STD 595 No. 26081

MOUNTING--Three surfaces, each with tapped mounting holes, can be utilized for mounting this unit. Refer to figure 9 for mounting details.

ACCESSORIES

Rack Adapters...Rack adapters LRA-4 and LRA-6, used for ruggedized mounting with or without chassis slides, are available, as well as rack adapters LRA-3 and LRA-5 which are used for simple rack installations where chassis slides are not required.

Metered and Non-Metered Panels...Metered panels MP-3, MP-5 and Non-Metered panels P-3, P-5 are available for use with the Lambda rack adapters.

Blank Panels...Full-rack, half-rack and quarter-rack panels can be used with the Lambda rack adapters. The following chart lists the panels and rack adapters that can be utilized together.

Rack Adapter	BLANK PANELS			Metered/Non Metered Panel
	1/2 Rack	1/4 Rack	Full Rack	
LRA 3	LBP-20	LBP-10	LBP-40	MP-5, P-5
LRA 6	LBP-20	LBP-10	LBP-40	MP-5, P-5
LRA 4	LBP-50	LBP-60	LBP-30	MP-3, P-3
LRA 5	LBP-50	LBP-60	LBP-30	MP-3, P-3

Overvoltage Protector... Externally mounted, Overvoltage Protectors LMOV-1, LMOV-2 and LMOV-3 are available for use with Lambda LM power supplies.

MODEL OPTIONS

Suffix "T" Input Option... Standard LM power supplies are available for operation with 200-250 volt, 45-440 cps input.

Suffix "Y" High Performance Option... All Lambda LM power supplies are available with high performance specifications. See italicized entries under SPECIFICATIONS AND FEATURES.

Suffix "R" Fungus Proofing Option... Standard LM power supplies can be obtained with fungus proofing treatment with MIL V 173 varnish for all fungi nutrient components.

Suffix "V" Input Option... Standard LM power supplies are available for operation with 205-265 volt 45-440 cps input.

THEORY OF OPERATION

GENERAL

The Lambda power supply consists of an AC input circuit and transformer ; a bias supply consisting of an auxiliary rectifier, filter, and a zener diode regulator; and a main regulator circuit consisting of the main rectifier and filter, a series regulator, emitter follower driver, an error amplifier, a current limit amplifier, an output voltage sensing circuit and an output current sensing circuit. In addition, certain models also contain a current sink circuit.

The circuit arrangement is shown in block diagram form in figure 7. The circuitry is discussed with reference to the block diagram and the schematic diagram.

FUNCTIONAL DESCRIPTION

Single phase input power is applied to transformer T1 through the input circuit containing thermostat S1, which protects the supply against overheating.

The main rectifier, a full-wave rectifier, provides the power which is filtered by capacitor C8 and then regulated via a series regulator and delivered to the output. Bias supply, half-wave, auxiliary rectifier CR7, provides voltage filtered by capacitor C7 and regulated by zener diode CR6 for current limit amplifier Q3 and error amplifier Q1, Q2 (or, as applicable, for voltage amplifier Q2). Zener diode CR1 and resistor R5, across the bias supply, provide a regulated temperature compensated reference voltage. Resistor R4 compensates for input voltage variations.

Operation of the voltage regulator circuit is determined by changes in the output voltage. A change in the output voltage is sensed by the sensing divider resistors which compare output voltage with the +S reference voltage. This provides an error voltage at junction of R2 and R3, (or as applicable R1 and R3) which is amplified by error amplifier Q1 and Q2, (and as applicable, by voltage amplifier Q2), and is current amplified by driver Q5. The amplified signal from the driver controls the voltage across series regulator Q8, (and as applicable, Q9) which functions as the active regulating element, restoring output voltage to the proper level.

*Current limit circuit operation is determined by changes in the load. Current limit amplifier Q3 samples load current through current sensing resistor R14. When the voltage drop across R14 increases compared with the preset voltage reference determined by R17 and R18, (and CR4 and Q4 where applicable), Q3 conducts. Thus, when the output current rating of the unit is exceeded, current limit amplifier Q3 conducts decreasing the current through driver Q5, resulting in an increase of voltage across the series regulator and a decrease of the output voltage, effectively limiting the output current to a safe value. The current limit value is determined by the factory setting of current limit potentiometer R17.

+When operating conditions approach short circuit, the output voltage decreases. Since the voltage determined by R17 and R18 is proportional to the output voltage, when the output voltage decreases, Q3 is biased into turn-on at lower and lower load currents until output voltage decreases to zero and current decreases to a predetermined low value.

+The following theory only applies for units with current sink Q4.

When operating conditions approach short circuit, and output voltage value decreases below the minimum voltage rating, current sink Q4 saturates and the divider R17, R18, Q4, R19 becomes purely resistive with no regulated reference for current limit operation. With Q4 in saturation the voltage reference becomes proportional to the output voltage, i.e., decreases as the output voltage decreases. This permits Q3 to turn on at lower and lower load currents until output voltage decreases to zero and current decreases to a predetermined low value.

*The following theory only applies for units with voltage amplifier Q2.

Current limit circuit operation is determined by changes in the load. When load current increases above the rated current value, the voltage drop across current limit potentiometer R17 increases, turning on current limit amplifier Q3. With Q3 conducting, the current to driver Q5 decreases, limiting the base current to series regulator Q8, Q9, which results in an increase of voltage across the series regulator and a decrease of the output voltage, effectively limiting the output current to a safe value. The current limit value is determined by the factory setting of current limit potentiometer R17.

When operating conditions reach short circuit, the output voltage value decreases to zero and the current decreases to a predetermined current limit value and remains unchanged.

OPERATING INSTRUCTIONS

BASIC MODE OF OPERATION

This power supply operates as a constant voltage source provided the load current does not exceed the rated value at 40°C. For continuous operation, load current must not exceed the rating for each ambient temperature. *When load current exceeds 110% of 40°C rating, both voltage and current decrease until voltage reaches zero and the current at short circuit equals approximately 30 percent or less of the rated current.

*For models LMB-0-7, LMB-0-14, LMB-0-32, LMB-0-60 output current remains limited to 110% of 40°C current rating.

MOUNTING

When using this unit as a mounted component, a cutout must be provided to permit free-flow of air through the unit. See figure 9 for cutout sizes and specific mounting details.

CONNECTIONS FOR OPERATION

NOTE: Make all connections to the unit before applying AC input power.

Ground Connections. The Lambda power supply can be operated either with negative or positive output terminal grounded. Both positive and negative ground connections are shown in the diagrams for all suggested output connections illustrated in this manual.

Connection Terminals. Make all connections to the supply at the terminal block on the rear of the supply. Apply input power to terminals 1 and 2; always connect the ungrounded (hot) lead to terminal 1.

The supply positive terminal is brought out to terminal 6; the negative terminal to terminal 4.

NOTE: When shipped from the factory, the supply is ready for use as a local-sensing constant voltage source. Jumpers are connected at the factory as shown in figure 3. Take care to remove the appropriate jumpers for load requirements that need different supply-load connections. Refer to the appropriate connection diagram.

Supply-Load Connections. The regulation of the supply at the load may change when connecting leads of practical length are used. To minimize the effect of the output load leads, remote sensing is used. Refer to figure 1 to determine voltage drop for particular cable lengths, wire size and current conditions. Lead lengths must be measured from supply terminals to load terminals as shown in figure 2.

Local-Sensing Connection, See Figure 3.

Remote-Sensing Connection, See Figure 4.

Programmed Voltage Connection Using External Resistor, See Figure 5. Discrete voltage steps can be programmed with a resistance voltage divider valued at nominal 200 ohms/volt output and a shorting-type switch. For continuous voltage variations, use a variable resistor with the same ohms/volt ratio in place of the voltage divider and shorting-type switch. Use low temperature coefficient resistor(s) to assure most stable operation.

Programmed Voltage Connection Using Programming Voltage, See Figure 6. The power supply voltage output can be programmed with an externally connected programming power supply. The output voltage of the programmed supply will maintain a one-to-one ratio with the voltage of the programming supply.

The programming supply must have a reverse current capability of 6 ma. minimum.

Alternatively, when supplies with less than 6 ma. reverse current capability are used, a resistor capable of drawing 6 ma. at the minimum programming voltage must be connected across the output terminals of the supply. This programming supply must be rated to handle all excess resistor current at the maximum programming voltage.

Operation After Thermostat Shutdown. The thermostat opens the input circuit only when the power supply output current exceeds the current rating specified for the operating ambient temperature, causing the unit to overheat. Do not exceed current rating specified for the operating ambient temperature. When the temperature of the unit decreases to a safe operating value, the thermostat will reset automatically.

Operation After Fuse Shutdown. Internal component failure is prevented by fuses which protect the components from damage caused by excessive currents. Fuses will blow when the maximum rated current value for the fuse is exceeded. Fatigue failure of fuses can occur when mechanical vibrations from the installation combine with thermally induced stresses to weaken the fuse metal. Many fuse failures are caused by a temporary condition and replacing the blown fuse will make the fuse protected circuit operative.

MAINTENANCE

GENERAL

This section describes trouble analysis routine, calibration and test procedures that are useful for servicing the Lambda power supply. A trouble chart is provided as an aid for the troubleshooter. Refer to the section on specifications and features for the minimum performance standards.

TROUBLE ANALYSIS

Whenever trouble occurs, systematically check all fuses, primary power lines, external circuit elements, and external wiring for malfunction before troubleshooting the equipment. Failures and malfunctions often can be traced to simple causes such as improper jumpers and supply-load connections or fuse failure due to metal fatigue.

Use the electrical schematic diagram and block diagram, figure 7, as an aid to locating trouble causes. The schematic diagram contains various circuit voltages that are averages for normal no load operation. Measure these voltages using the conditions for measurement specified on the schematic diagram. Use measuring probes carefully to avoid causing short circuits and damaging circuit components.

CHECKING TRANSISTORS AND CAPACITORS

Check transistors with an in-circuit transistor checker. If no checker is available, transistors can be checked with an ohmmeter that has a highly limited current capability. Observe proper polarity for PNP or NPN to avoid error in measurement. The forward transistor resistance is low but never ZERO; backward resistance is always higher than the forward resistance.

Do not assume trouble is eliminated when only one part is replaced. This is especially true when one transistor fails, causing other transistors to fail. Replacing only one transistor and turning power on, before checking for additional faulty components could damage the replaced component.

When soldering semi-conductor devices, hold the lead being soldered with a pair of pliers or a commercial heat sink device placed between the component and the solder joint.

NOTE: The leakage resistance obtained from a simple resistance check of a capacitor is not always an indication of a faulty capacitor. In all cases the capacitors are shunted with resistances, some of which have low values. Only a dead short is a true indication of a shorted capacitor.

PRINTED CIRCUIT BOARD MAINTENANCE TECHNIQUES

1. If foil is intact but not covered with solder it is a good contact. Do not attempt to cover with solder.
2. Voltage measurements can be made from either side of the board. Use a needle-point probe to penetrate to the wiring whenever a protective coating is used on the wiring. A brass probe can be soldered to an alligator clip adapted to measuring instrument.
3. Always use a heat sink when soldering transistors; a transistor pad with mounting feet is an effective heat sink.
4. Broken or damaged printed wiring is usually the result of an imperfection, strain or careless soldering. To repair small breaks, tin a short piece of hook-up wire to bridge

the break, and holding the wire in place, flow solder along the length of wire so that it becomes part of the circuitry.

5. When unsoldering components from the board never pry or force loose the part; unsolder the component by using the wicking process described below:
 - (a) Select a 3/16 inch tinned copper braid for use as a wick; if braid is not available, select AWG No. 14 or No. 16 stranded wire with 1/2 inch insulation removed.
 - (b) Dip the wick in liquid rosin flux.
 - (c) Place the wick onto the soldered connection and apply soldering iron onto the wick.
 - (d) When sufficient amount of solder flows onto the wick, freeing the component, simultaneously remove iron and wick.

TROUBLE CHART

The trouble chart is intended as a guide for locating trouble causes, and is used along with the schematic diagram.

The operating conditions assumed for the trouble chart are as follows:

- (a) AC power of proper voltage and frequency is present at input terminals.
- (b) Either positive or negative terminal is connected to chassis ground.
- (c) The power supply is connected for constant voltage with local sensing. See schematic; dotted lines indicate jumpers connected for local sensing operation.

TROUBLE CHART

Symptom	Probable Cause	Remedy
1. No output voltage	No power input, thermostat S1 open	Check power source, S1, line cord and line cord plug; shut off unit, allow to cool and check ambient temperature
	Improper output terminal connection	Refer to appropriate connection diagram, and check for correct connections.
	Faulty Q2, CR1, CR6 (or Q3 for ZERO VOLT units)	Check Q2, CR1, CR6 (or Q3) for short and replace as required
2. Unable to adjust output voltage	Damaged VOLTAGE ADJUST control	Check R1 for shorts and/or open; replace as required
	Supply operating as constant current source at current limit value	Remove load, check load value and check for shorts and/or improper supply-load connections; refer to appropriate diagram for correct connections
3. Output voltage too high	Improper output terminal connection	Refer to appropriate connection diagram, and check for correct connections

TROUBLE CHART (cont'd)

<u>Symptom</u>	<u>Probable Cause</u>	<u>Remedy</u>
3. (Cont'd)	Faulty Q1, R1, Q8, (Q9 as req'd.), Q5 or CR1	Check R1 for open; Q8, (Q9), Q5, Q1 for short, CR1 for open and replace as required
4. Output voltage too low	Load resistance improper for unit ratings Faulty Q2, Q3, R14, R17 (or CR4 where used)	Check load resistance value Check Q2, Q3 (or CR4) for short, R14, R17 for open, replace as required
5. High ripple and unregulated DC output	Load resistance improper for unit ratings	Check load resistance value
6. This step only for units with current sink Q4. Current limit value improper and varies directly with output voltage	Faulty Q4	Check Q4 for short and replace as required
7. High ripple	Improper ground	Connect terminal 6 or terminal 4 to ground terminal 5

PERFORMANCE CHECK

Check the ripple and regulation of the power supply using the test connection diagram shown in figure 8. Use suggested test equipment or equivalent to obtain accurate results. Refer to SPECIFICATIONS AND FEATURES for minimum performance standards.

Set the differential meter, DC VTVM (John Fluke Model 825A or equivalent) to the selected power supply operating voltage. Check the power supply load regulation accuracy while switching from the full load to no-load condition. Long load leads should be a twisted pair to minimize AC pick-up.

Use a Variac to vary the line voltage from 105-132 or 132-105 volts AC and check the power supply line regulation accuracy on the VTVM differential meter.

Use a VTVM: Ballantine 320 or equivalent, to measure rms ripple voltage of the power supply DC output. Use oscilloscope to measure peak-to-peak ripple voltage of the power supply DC output.

ADJUSTMENT OF CALIBRATION CONTROL R17

Whenever Q3, R14* or R17* (and Q4, and CR4 where used) are replaced, and voltage and current indications do not reflect maximum ratings, adjust R17 as follows:

*For models LMB-0-7, LMB-0-14, LMB-0-32, LMB-0-60, adjustment is required only when R14 or R17 is replaced. The adjustment procedure requires that the power supply is removed from associated equipment, is at an ambient temperature of 25-30°C, and is stabilized and not operating.

1. Remove AC power input to the supply.
2. Unsolder wiper of R17 from resistor housing and turn to full CW position.
3. Operate power supply for constant voltage with local sensing, connected as shown in figure 3, with no external load.
- 4.** Turn voltage adjust control until minimum rated output voltage is obtained.
- 5.** Apply load so that output current is 110% of 40°C rating for the unit.
- 6.** Using an oscilloscope, Tektronix 503 or equivalent, observe output voltage while adjusting R17 in a CCW direction. Adjust R17 until output ripple increases sharply and oscilloscope pattern changes.
- 7.** After adjustment is completed, remove AC power input to the supply and solder wiper of R17 to resistor housing.
- 8.** After soldering, check setting and repeat adjustment procedure if required.
- ** Perform alternate steps 4A through 9A for adjustment of R17 on models, LMB-0-7, 0-14, 0-32 and 0-60.
- 4A. Turn voltage adjust control until rated output voltage is obtained.
- 5A. Apply load so that output current is a maximum of 130% of 40°C rating for the unit.
- 6A. Using an oscilloscope, Tektronix 503 or equivalent, observe unit output voltage while adjusting R17 in a CCW direction. Adjust R17 until output ripple increases sharply and oscilloscope pattern changes.
- 7A. Place a DC ammeter of appropriate scale across output terminals 4 and 6 of the supply. The meter indication shall be a maximum of 133% of 40°C rating for the unit.
- 8A. After adjustment is completed, remove AC power input to the supply and solder wiper of R17 to resistor housing.
- 9A. After soldering, check setting and repeat adjustment procedure if required.

SERVICE

When additional instructions are required or repair service is desired, contact the nearest office of the Lambda Electronics Corp. where trained personnel and complete facilities are ready to assist you.

Please include the power supply model and serial number together with complete details of the problem. On receipt of this information, Lambda will supply service data or advise shipping for factory repair service.

All repairs not covered by the warranty will be billed at cost and an estimate forwarded for approval before work is started.

PARTS ORDERING

Standard components and special components used in Lambda power supply can be obtained from the factory. In case of emergency, critical spare parts are available through any Lambda office.

The following information must be included when ordering parts:

1. Model and number and serial number of power supply and purchase date.
2. Lambda part number.
3. Description of part together with circuit designation.
4. If part is not an electronic part, or is not listed, provide a description, function, and location of the part.

PARTS LIST

The electrical parts located on all LM-B models are listed here. Parts common to a group of LM-B models are listed first. Unique parts of individual models within the group are listed separately, by model, immediately following the group common-parts listing. In addition there are separate listings of parts for the metered panel (MP) option, the Y option and the overvoltage protection (OV) option, as applicable, for all LM models. The parts listed for models LMB-0-60 and LM-B60 do not utilize the common parts -- unique parts listings; all the parts for these models are sequentially listed under the applicable heading "PARTS FOR MODEL". Parts for the T option, V option and R option are included at the end of this listing.

MODELS LM-217 — LM-220

COMMON PARTS

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
C1	Cap., mylar, 0.033 mfd ±10% 400 vdc	CGL-33-006	\$.27
C2	Cap., mylar, 0.22 mfd ±10%, 100 vdc	CGM-22-003	.33
C4	Cap., elect., 3 mfd -10 +75%, 100 vdc	CBN-30-015	1.58
C5	Cap., mylar, 0.10 mfd ±10%, 200 vdc	CGL-10-002	.36
C7	Cap., elect., 140 mfd -10 +100%, 30 vdc	CBR-14-030	2.25
C12	Cap., mylar, 0.001 mfd ±5%, 200 vdc	CGK-10-004	.21
CR1*	Rectifier, zener diode	FBM-Z104	4.35
CR2	Rectifier	FBL-00-030	1.40
CR3	Same as CR2		
CR4	Rectifier, zener diode	FBM-Z102	2.75
CR5	Same as CR2		
CR6	Rectifier, zener diode	FBM-Z103	4.87
CR7	Same as CR2		
Q1	Transistor, NPN	FBN-L110	3.25
Q2	Same as Q1		
Q3	Same as Q1		
Q6, Q7	Not assigned		
R3	Res., ww, 1,200 ohms, ±3%, 2w	DFS-12-030	.90
R4*	Res., film, 15,000 ohms ±2%, 1/2w	DCT-15-013	.30
R5	Res., film, 220 ohms ±2%, 1/2w	DCR-22-005	.30
R6	Res., comp., 180,000 ohms ±10%, 1/2w	DEB-1841	.12
R7	Res., film, 3,900 ohms ±5%, 1/2w	DCS-39-014	.25
R8	Res., comp., 4,700 ohms ±10%, 1/2w	DEB-4721	.12
R9	Res., comp., 150 ohms ±10%, 1/4w	DCB-1511	.10
R10	Res., comp., 2,200 ohms ±10%, 1/2w	DEB-2221	.12
R11	Res., comp., 22,000 ohms ±10%, 1/2w	DEB-2231	.12
R12	Res., comp., 47 ohms ±10%, 1/2w	DEB-4701	.12
R13*	Res., ww, 600 ohms ±3% 3w	DFR-60-005	.89

MODELS LM-217 — LM-220 (Cont)

COMMON PARTS (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
R15	Not assigned		\$
R17	Res., var., ww, 1,200 ohms ±10%, 1-1/2w	DNS-12-026	1.25
R18	Same as R7		
R22	Res., comp., 100 ohms ±10%, 1/2w	DEB-1011	.12

* This part not used on units with "Y" option

UNIQUE PARTS

MODEL LM-217

C3	Cap., elect., 160 mfd -10 +100%, 60 vdc	CBR-16-039	2.00
C6	Cap., mylar, 0.01 mfd ±10%, 200 vdc	CGL-10-002	.36
C8	Cap., elect., 2,100 mfd -10 +100%, 35 vdc	CBS-21-043	3.87
C9	Cap., mylar, 0.018 mfd ±10%, 200 vdc	CGL-18-005	.24
C10	Same as C9		
C11	Not assigned		
CR8	Not assigned		
Thru CR11			
CR13, CR14	Rectifier	FBL-00-047	.88
Q4	Transistor, PNP,	FBN-L103	1.76
Q5	Transistor, NPN,	FBN-L109	2.75
Q8	Transistor, NPN	FBN-36485	4.13
R1	Res., var., ww, 2,200 ohms ±5%, 5w	DNS-22-023 or DNS-22-053	1.75 2.50
R2	Res., ww, 1,200 ohms ±3%, 2w	DFS-12-030	.90
R14	Res., ww, 0.39 ohms ±5%, 3w	DFM-39-043	1.00
R16	Res., comp., 1,800 ohms ±10%, 1/2w	DEB-1821	.12
R19	Res., film, 1,800 ohms ±5%, 1/2w	DCS-18-013	.25
R20	Res., comp., 15,000 ohms ±10%, 1/2w	DEB-1531	.12
R21	Same as R19		
T1	Transformer	ABA-217	19.50

UNIQUE PARTS (Cont)

MODEL LM-218

<u>CIRC. DESIG.</u>	<u>DESCRIPTION</u>	<u>LAMBDA NO.</u>	<u>UNIT PRICE</u>
C3	Cap., elect., 160 mfd -10 +100%, 60 vdc	CBR-16-039	\$ 2.00
C6	Cap., mylar, 0.0033 mfd ±10%, 100 vdc	CGK-33-003	.33
C8	Cap., elect., 2,100 mfd -10 +100%, 35 vdc	CBS-21-043	3.87
C9, C10	Not assigned		
C11	Cap., mylar, 0.018 mfd ±10%, 200 vdc	CGL-18-005	.24
CR8 Thru CR11	Rectifier	FBL-00-047	.88
Q4	Transistor, PNP,	FBN-L103	1.76
Q5	Transistor, NPN,	FBN-L109	2.75
Q8	Transistor, NPN	FBN-36220	6.60
R1	Res., var., ww, 4,500 ohms ±5%, 5w	DNS-45-024 or DNS-45-059	1.75 2.50
R2	Res., ww, 2,200 ohms ±3%, 3w	DFS-20-032	.87
R14	Res., ww, 0.56 ohms ±5%, 3w	DFM-56-042	.83
R16	Res., comp., 1,800 ohms ±10%, 1/2w	DEB-1821	.12
R19	Res., film, 4,700 ohms ±5%, 1/2w	DCS-47-003	.25
R20	Res., comp., 47,000 ohms ±10%, 1/2w	DEB-4731	.12
R21	Res., film, 2,400 ohms ±5%, 1/2w	DCS-24-001	.25
T1	Transformer	ABA-218	19.50

MODEL LM-219

C3	Cap., elect., 90 mfd -10 +100%, 85 vdc	CBP-90-010	3.00
C6	Cap., mylar, 0.018 mfd ±10%, 200 vdc	CGL-18-005	.24
C8	Cap., elect., 1,100 mfd -10 +100%, 60 vdc	CBS-11-042	3.67
C9, C10	Not assigned		
C11	Same as C6		
CR8 Thru CR11	Rectifier	FBL-00-036	.60
Q4	Transistor, PNP	FBN-L103	1.76
Q5	Transistor, NPN	FBN-L108	2.52
Q8	Transistor, NPN	FBN-36487	5.63
R1	Res., var., ww, 4,500 ohms ±5%, 5w	DNS-45-024 or DNS-45-059	1.75 2.50
R2	Res., ww, 3,000 ohms ±3%, 3w	DFS-30-021	.62
R14	Res., ww, 0.56 ohms ±5%, 3w	DFM-56-042	.83
R16	Res., comp., 1,800 ohms ±10%, 1/2w	DEB-1821	.12
R19	Res., film, 10,000 ohms ±5%, 1/2w	DCT-10-008	.25
R20	Res., comp., 120,000 ohms ±10%, 1/2w	DEB-1241	.12
R21	Res., film, 4,700 ohms ±5%, 1/2w	DCS-47-003	.25
T1	Transformer	ABA-219	19.50

UNIQUE PARTS (Cont)

MODEL LM-220

<u>CIRC. DESIG.</u>	<u>DESCRIPTION</u>	<u>LAMBDA NO.</u>	<u>UNIT PRICE</u>
C3	Cap., elect., 90 mfd -10 +100%, 85 vdc	CBP-90-010	\$ 3.00
C6	Cap., mylar, 0.01 mfd ±10%, 200 vdc	CGL-10-002	.36
C8	Cap., elect., 730 mfd -10 +100%, 85 vdc	CBR-73-029	4.20
C9, C10	Not assigned		
C11	Cap., mylar, 0.018 mfd ±10%, 200 vdc	CGL-18-005	.24
CR8 Thru CR11	Rectifier	FBL-00-036	.60
Q4	Transistor, PNP	FBN-L107	6.85
Q5	Transistor, NPN	FBN-L108	2.52
Q8	Transistor, NPN	FBN-35902	9.90
R1	Res., var., ww, 9,000 ohms ±5%, 5w	DNS-90-025 or DNS-90-051	2.00 2.50
R2	Res., ww, 4,500 ohms ±3%, 3w	DFS-45-044	.87
R14	Res., ww, 1.0 ohms ±3%, 3w	DFN-10-041	.66
R16	Res., comp., 4,700 ohms ±10%, 1/2w	DEB-4721	.12
R19	Res., film, 15,000 ohms ±2%, 1/2w	DCT-15-013	.30
R20	Res., comp., 180,000 ohms ±10%, 1/2w	DEB-1841	.12
R21	Res., film, 10,000 ohms ±5%, 1/2w	DCT-10-008	.25
T1	Transformer	ABA-220	19.50

COMMON PARTS

MODELS LM-B3 — LM-B5

C1	Cap., mylar, 0.033 mfd ±10%, 400 vdc	CGL-33-006	.27
C2	Cap., mylar, 0.22 mfd ±10%, 100 vdc	CGM-22-003	.33
C3	Cap., elect., 500 mfd -10 +100%, 20 vdc	CBR-50-037	2.27
C4	Cap., elect., 3.0 mfd -10 +75%, 100 vdc	CBN-30-015	1.58
C5	Cap., mylar, 0.01 mfd ±10%, 200 vdc	CGL-10-002	.36
C6	Same as C5		
C7*	Cap., elect., 140 mfd -10% +100%, 30 vdc	CBR-14-030	2.25
C8	Cap., elect., 3,600 mfd -10% +100%, 20 vdc	CBS-36-044	2.36
C9	Cap., mylar, 0.018 mfd ±10%, 200 vdc	CGL-18-005	.24
C10	Same as C9		
C11	Not assigned		
C12	Cap., mylar, 0.001 mfd ±10%, 200 vdc	CGK-10-004	.21
CR1*	Rectifier, zener diode	FBM-Z104	4.35
CR2	Rectifier	FBL-00-030	1.40
CR3	Same as CR2		
CR4	Not assigned		
CR5	Not assigned		
CR6	Rectifier, zener diode	FBM-Z103	4.87
CR7	Same as CR2		
CR8	Not assigned		

COMMON PARTS (Cont)

MODELS LM-B3 — LM-B5 (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
CR9	Rectifier	FBL-00-047	\$.88
CR10	Not assigned		
CR11	Same as CR9		
Q1	Transistor, NPN	FBN-L110	3.25
Q2	Same as Q1		
Q3	Same as Q1		
Q4	Not assigned		
Q5	Transistor, NPN	FBN-L113	1.96
Q6	Not assigned		
Q7	Not assigned		
Q8	Transistor, NPN	FBN-36972	6.50
R3	Res., ww, 1,200 ohms $\pm 3\%$, 2w	DFS-12-030	.90
R4*	Res., film, 15,000 ohms $\pm 2\%$, 1/2w	DCT-15-013	.30
R5	Res., film 220 ohms $\pm 2\%$, 1/2w	DCR-22-005	.30
R6	Res., comp., 180,000 ohms $\pm 10\%$, 1/2w	DEB-1841	.12
R7	Res., film, 3,900 ohms $\pm 5\%$, 1/2w	DCS-39-014	.25
R8	Res., comp., 4,700 ohms $\pm 10\%$, 1/2w	DEB-4721	.12
R9	Res., comp., 150 ohms $\pm 10\%$, 1/4w	DCB-1511	.10
R10	Res., comp., 2,200 ohms $\pm 10\%$, 1/2w	DEB-2221	.12
R11	Res., comp., 22,000 ohms $\pm 10\%$, 1/2w	DEB-2231	.12
R12	Res., comp., 47 ohms $\pm 10\%$, 1/2w	DEB-4701	.12
R13*	Res., ww, 600 ohms $\pm 3\%$, 3w	DFR-60-005	.89
R14	Res., ww, 0.22 ohms $\pm 5\%$, 5w	DFM-22-045	1.00
R15	Not assigned		
R16	Res., comp., 820 ohms $\pm 10\%$, 1/2w	DEB-8211	.12
R17	Res., var., ww, 1,200 ohms $\pm 10\%$, 1-1/2w	DNS-12-026	1.25
R19 Thru R21	Not assigned		
R22	Res., comp., 100 ohms $\pm 10\%$, 1/2w	DEB-1011	.12

* This part not used on units with "Y" option

UNIQUE PARTS

MODEL LM-B3

R1	Res., var., ww, 300 ohms $\pm 5\%$, 5w	DNR-30-018	1.95
R2	Res., ww, 430 ohms, $\pm 3\%$, 3w	DFR-43-058	.50
R18	Not assigned		
T1	Transformer	ABA-B3	19.50

UNIQUE PARTS

MODEL LM-B3P3

R1	Res., var., ww, 600 ohms, $\pm 5\%$, 5w	DNR-60-019 or DNR-60-026	2.25 2.50
R2	Res., ww, 430 ohms, $\pm 3\%$, 3w	DFR-43-058	.50
R18	Not assigned		
T1	Transformer	ABA-B4P5	19.50

UNIQUE PARTS (Cont)

MODEL LM-B3P6

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
R1	Res., var., wirewound, 600 ohms $\pm 5\%$, 5w	DNR-60-019 or DNR-60-026	\$2.25 2.50
R2	Res., wirewound, 430 ohms $\pm 3\%$, 3w	DFR-43-058	.50
R18	Not assigned		
T1	Transformer	ABA-B4P5	19.50

MODEL LM-B4

R1	Res., var., wirewound, 600 ohms $\pm 5\%$, 5w	DNR-60-019 or DNR-60-026	2.25 2.50
R2	Res., wirewound, 600 ohms $\pm 3\%$, 3w	DFR-60-005	.89
R18	Not assigned		
T1	Transformer	ABA-B4P5	19.50

MODEL LM-B4P5

R1	Res., var., wirewound, 600 ohms $\pm 5\%$, 5w	DNR-60-019 or DNR-60-026	2.25 2.50
R2	Res., wirewound, 650 ohms $\pm 3\%$, 3w	DFR-65-062	1.00
R18	Res., film, 390 ohms $\pm 5\%$, 1/2w	DCR-39-004	.20
T1	Transformer	ABA-B4P5	19.50

MODEL LM-B5

R1	Res., var., wirewound, 600 ohms $\pm 5\%$, 5w	DNR-60-019 or DNR-60-026	2.25 2.50
R2	Res., wirewound, 650 ohms $\pm 3\%$, 3w	DFR-65-062	1.00
R18	Res., film, 910 ohms $\pm 5\%$, 1/2w	DCR-91-008	.25
T1	Transformer	ABA-B5	19.50

MODELS LM-B6 — LM-B48

COMMON PARTS

C1	Cap., mylar, 0.033 mfd $\pm 10\%$, 400 vdc	CGL-33-006	.27
C2	Cap., mylar, 0.22 mfd $\pm 10\%$, 100 vdc	CGM-22-003	.33
C4	Cap., elect., 3.0 mfd -10 + 75% 100 vdc	CBN-30-015	1.58
C5	Cap., mylar, 0.01 mfd $\pm 10\%$, 200 vdc	CGL-10-002	.36
C7*	Cap., elect., 140 mfd -10% + 100%, 30 vdc	CBR-14-030	2.25
C9	Not assigned		
C10	Not assigned		
C11	Cap., mylar, 0.018 mfd $\pm 10\%$, 200 vdc	CGL-18-005	.24
C12	Cap., mylar, 0.001 mfd $\pm 10\%$, 200 vdc	CGK-10-004	.21
CR1*	Rectifier, zener diode	FBM-Z104	4.35
CR2	Rectifier	FBL-00-030	1.40
CR3	Same as CR2		
CR4	Not assigned		
CR5	Not assigned		
CR6	Rectifier, zener diode	FBM-Z103	4.87
CR7	Same as CR2		
Q1	Transistor, NPN	FBN-L110	3.25
Q2	Same as Q1		
Q3	Same as Q1		
Q4	Not assigned		

COMMON PARTS (Cont)

MODELS LM-B6 — LM-B48 (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
Q6	Not assigned		\$
Q7	Not assigned		
R3	Res., ww, 1, 200 ohms, ±3%, 2w	DFS12-030	.90
R4*	Res., film, 15,000 ohms ±2%, 1/2w	DCT15-013	.30
R5	Res., film, 220 ohms ±2%, 1/2w	DCR22-005	.30
R6	Res., comp., 180,000 ohms ±10%, 1/2w	DEB1841	.12
R7	Res., film, 3,900 ohms ±5%, 1/2w	DCS39-014	.25
R8	Res., comp., 4,700 ohms ±10%, 1/2w	DEB4721	.12
R9	Res., comp., 150 ohms ±10%, 1/4w	DCB1511	.10
R10	Res., comp., 2,200 ohms ±10%, 1/2w	DEB2221	.12
R11	Res., comp., 22,000 ohms ± 10%, 1/2w	DEB2231	.12
R12	Res., comp., 47 ohms ± 10%, 1/2w	DEB4701	.12
R13*	Res., ww, 600 ohms ± 3%, 3w	DFR60-005	.89
R15	Not assigned		
R17	Res., var., ww, 1,200 ohms ± 10%, 1-1/2w	DNS12-026	1.25
R19 Thru R21	Not assigned		
R22	Res., comp., 100 ohms ± 10% 1/2w	DEB1011	.12

*This part not used on units with "Y" option

UNIQUE PARTS

MODEL LM-B6

C3	Cap., elect., 500 mfd -10 + 100%, 20 vdc	CBR50-037	2.27
C6	Cap., mylar 0.01 mfd, ±10%, 200 vdc	CGL10-002	.36
C8	Cap., elect., 3,600 mfd, -10 + 100%, 20 vdc	CBS36-044	2.36
CR8 CR9 Thru CR11	Rectifier Same as CR8	FBL00-047	.88
Q5	Transistor, NPN	FBN-L113	1.96
Q8	Transistor, NPN	FBN-36972	6.50
R1	Res., var., wirewound, 600 ohms, ±5%, 5w	DNR60-019 or DNR-60-026	2.25 2.50
R2	Res., wirewound, 800 ohms, ±3%, 2w	DFR80-037	.84
R14	Res., wirewound, 0.22 ohms, ±5%, 5w	DFM22-045	1.00
R16	Res., comp., 820 ohms, ±10%, 1/2w	DEB8211	.12
R18	Res., film, 910 ohms, ±5%, 1/2w	DCR91-008	.25
T1	Transformer	ABA-B6	19.50

MODEL LM-B8

C3	Cap., elect., 500 mfd -10 + 100%, 20 vdc	CBR50-037	2.27
C6	Cap., mylar 0.01 mfd, ±10%, 200 vdc	CGL10-002	.36

UNIQUE PARTS (Cont)

MODEL LM-B8 (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
C8	Cap., elect., 3,600 mfd, -10 + 100%, 20 vdc	CBS36-044	\$ 2.36
CR8	Rectifier	FBL00-047	.88
CR9 Thru CR11	Same as CR8		
Q5	Transistor, NPN	FBN-L113	1.96
Q8	Transistor, NPN	FBN36972	6.50
R1	Res., var., wirewound, 1,000 ohms, ±5%, 5w	DNS10-032	1.95
R2	Res., wirewound, 1,200 ohms, ±3%, 2w	DFS12-030	.90
R14	Res., wirewound, 0.22 ohms, ±5%, 5w	DFM22-045	1.00
R16	Res., comp., 820 ohms, ±10%, 1/2w	DEB8211	.12
R18	Res., film, 1,800 ohms, ±5%, 1/2w	DCS18-013	.25
T1	Transformer	ABA-B8	19.50

MODEL LM-B10

C3	Cap., elect., 280 mfd -10 + 100%, 35 vdc	CBR28-038	1.77
C6	Cap., mylar 0.0033 mfd, ±10%, 200 vdc	CGK33-003	.33
C8	Cap., elect., 2,100 mfd, -10 + 100%, 35 vdc	CBS21-043	3.67
CR8 CR9 Thru CR11	Rectifier Same as CR8	FBL00-047	.88
Q5	Transistor, NPN	FBN-L113	1.96
Q8	Transistor, NPN	FBN36972	6.50
R1	Res., var., wirewound, 2,200 ohms, ±5%, 5w	DNS22-023 or DNS-22-053	1.75 2.50
R2	Res., wirewound, 1,200 ohms, ±3%, 2w	DFS12-030	.90
R14	Res., wirewound, 0.22 ohms, ±5%, 5w	DFM22-045	1.00
R16	Res., comp., 1,500 ohms, ±10%, 1/2w	DEB1521	.12
R18	Res., film, 1,800 ohms, ±5%, 1/2w	DCS18-013	.25
T1	Transformer	ABA-B10	19.50

MODEL LM-B12

C3	Cap., elect., 280 mfd -10 + 100%, 35 vdc	CBR28-038	1.77
C6	Cap., mylar 0.0033 mfd, ±10%, 200 vdc	CGK33-003	.33
C8	Cap., elect., 2,100 mfd, -10 + 100%, 35 vdc	CBS21-043	3.67
CR8 CR9 Thru CR11	Rectifier Same as CR8	FBL00-047	.88
Q5	Transistor, NPN	FBN-L113	1.96
Q8	Transistor, NPN	FBN36972	6.50
R1	Res., var., wirewound, 2,200 ohms, ±5%, 5w	DNS22-023 or DNS-22-053	1.75 2.50
R2	Res., wirewound, 1,800 ohms, ±3%, 3w	DFS18-048	.60
R14	Res., wirewound, 0.22 ohms, ±5%, 5w	DFM22-045	1.00

UNIQUE PARTS (Cont)

MODEL LM-B12 (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
R16	Res., comp., 1,500 ohms, $\pm 10\%$, 1/2w	DEB1521	\$.12
R18	Res., film, 1,800 ohms, $\pm 5\%$, 1/2w	DCS18-013	.25
T1	Transformer	ABA-B12	19.50

MODEL LM-B15

C3	Cap., elect., 280 mfd -10 +100%, 35 vdc	CBR28-038	1.77
C6	Cap., mylar 0.0033 mfd, $\pm 10\%$, 200 vdc	CGK33-003	.33
C8	Cap., elect., 2,100 mfd, -10 +100%, 35 vdc	CBS21-043	3.67
CR8	Rectifier	FBL00-047	.88
CR9	Same as CR8		
Thru CR11			
Q5	Transistor, NPN	FBN-L113	1.96
Q8	Transistor, NPN	FBN36485	4.13
R1	Res., var., wirewound, 2,200 ohms, $\pm 5\%$, 5w	DNS22-023 or DNS22-053	1.75 2.50
R2	Res., wirewound, 1,800 ohms, $\pm 3\%$, 3w	DFS18-048	.60
R14	Res., wirewound, 0.39 ohms, $\pm 5\%$, 3w	DFM39-043	1.00
R16	Res., comp., 2,700 ohms, $\pm 10\%$, 1/2w	DEB2721	.12
R18	Res., film, 1,800 ohms, $\pm 5\%$, 1/2w	DCS18-013	.25
T1	Transformer	ABA-B15	19.50

MODEL LM-B18

C3	Cap., elect., 280 mfd -10 +100%, 35 vdc	CBR28-038	1.77
C6	Cap., mylar 0.0033 mfd, $\pm 10\%$, 200 vdc	CGK33-003	.33
C8	Cap., elect., 2,100 mfd, -10 +100%, 35 vdc	CBS21-043	3.67
CR8	Rectifier	FBL00-047	.88
CR9	Same as CR8		
Thru CR11			
Q5	Transistor, NPN	FBN-L113	1.96
Q8	Transistor, NPN	FBN36220	6.60
R1	Res., var., wirewound, 2,200 ohms, $\pm 5\%$, 5w	DNS22-023 or DNS22-053	1.75 2.50
R2	Res., wirewound, 2,500 ohms, $\pm 3\%$, 3w	DFS-25-036	.53
R14	Res., wirewound, 0.39 ohms, $\pm 5\%$, 3w	DFM39-043	1.00
R16	Res., comp., 2,700 ohms, $\pm 10\%$, 1/2w	DEB2721	.12
R18	Res., film, 6,800 ohms, $\pm 5\%$, 1/2w	DCS68-021	.25
T1	Transformer	ABA-B18	19.50

MODEL LM-B20

C3	Cap., elect., 280 mfd -10 +100%, 35 vdc	CBR28-038	1.77
C6	Cap., mylar 0.0033 mfd, $\pm 10\%$, 200 vdc	CGK33-003	.33
C8	Cap., elect., 2,100 mfd, -10 +100%, 35 vdc	CBS21-043	3.67
CR8	Rectifier	FBL00-047	.88
CR9	Same as CR8		
Thru CR11			

UNIQUE PARTS (Cont)

MODEL LM-B20 (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
Q5	Transistor, NPN	FBN-L109	\$2.75
Q8	Transistor, NPN	FBN36220	6.60
R1	Res., var., wirewound, 2,200 ohms, $\pm 5\%$, 5w	DNS-22-023 or DNS-22-053	1.75 2.50
R2	Res., wirewound, 2,500 ohms, $\pm 3\%$, 3w	DFS25-036	.53
R14	Res., wirewound, 0.39 ohms, $\pm 5\%$, 3w	DFM39-043	1.00
R16	Res., comp., 2,700 ohms, $\pm 10\%$, 1/2w	DEB2721	.12
R18	Res., film, 6,800 ohms, $\pm 5\%$, 1/2w	DCS68-021	.25
T1	Transformer	ABA-B20	19.50

MODEL LM-B24

C3	Cap., elect., 160 mfd -10 +100%, 60 vdc	CBR16-039	2.00
C6	Cap., mylar 0.0033 mfd, $\pm 10\%$, 200 vdc	CGK33-003	.33
C8	Cap., elect., 1,100 mfd, -10 +100%, 60 vdc	CBS11-042	3.67
CR8	Rectifier	FBL00-036	.60
CR9	Same as CR8		
Thru CR11			
Q5	Transistor, NPN	FBN-L109	2.75
Q8	Transistor, NPN	FBN36220	6.60
R1	Res., var., wirewound, 2,200 ohms, $\pm 5\%$, 5w	DNS22-023 or DNS22-053	1.75 2.50
R2	Res., wirewound, 3,600 ohms, $\pm 3\%$, 3w	DFS36-050	.60
R14	Res., wirewound, 0.56 ohms, $\pm 5\%$, 3w	DFM56-042	.83
R16	Res., comp., 2,700 ohms, $\pm 10\%$, 1/2w	DEB2721	.12
R18	Res., film, 6,800 ohms, $\pm 5\%$, 1/2w	DCS68-021	.25
T1	Transformer	ABA-B24	19.50

MODEL LM-B28

C3	Cap., elect., 160 mfd -10 +100%, 60 vdc	CBR16-039	2.00
C6	Cap., mylar 0.0033 mfd, $\pm 10\%$, 200 vdc	CGK33-003	.33
C8	Cap., elect., 1,100 mfd, -10 +100%, 60 vdc	CBS11-042	3.67
CR8	Rectifier	FBL00-036	.60
CR9	Same as CR8		
Thru CR11			
Q5	Transistor, NPN	FBN-L109	2.75
Q8	Transistor, NPN	FBN36487	5.63
R1	Res., var., wirewound, 2,200 ohms, $\pm 5\%$, 5w	DNS22-023 or DNS-22-053	1.75 2.50
R2	Res., wirewound, 4,500 ohms, $\pm 3\%$, 3w	DFS45-044	.87
R14	Res., wirewound, 0.56 ohms, $\pm 5\%$, 3w	DFM56-042	.83
R16	Res., comp., 3,900 ohms, $\pm 10\%$, 1/2w	DEB3921	.12
R18	Res., film, 6,800 ohms, $\pm 5\%$, 1/2w	DCS68-021	.25
T1	Transformer	ABA-B28	19.50

MODEL LM-B36

C3	Cap., elect., 160 mfd -10 +100%, 60 vdc	CBR16-039	2.00
----	---	-----------	------

UNIQUE PARTS (Cont)

MODEL LM-B36 (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
C6	Cap., mylar 0.0033 mfd, ±10%, 200 vdc	CGK-33-003	\$.33
C8	Cap., elect., 1,100 mfd, -10 +100%, 60 vdc	CBS-11-042	3.67
CR8	Rectifier	FBL-00-036	.60
CR9 Thru CR11	Same as CR8		
Q5	Transistor, NPN	FBN-L108	2.52
Q8	Transistor, NPN	FBN-36487	5.63
R1	Res., var., wirewound, 3,300 ohms, ±5%, 5w	DNS-33-035 or	2.00
R2	Res., wirewound, 5,600 ohms, ±3%, 3w	DNS-33-054	2.50
		DFS-56-053	.60
R14	Res., wirewound, 0.56 ohms, ±5%, 3w	DFM-56-042	.83
R16	Res., comp., 3,900 ohms, ±10%, 1/2w	DEB-3921	.12
R18	Res., film, 10,000 ohms, ±5%, 1/2w	DCT-10-008	.25
T1	Transformer	ABA-B36	19.50

MODEL LM-B48

C3	Cap., elect., 90 mfd -10 +100%, 85 vdc	CBP-90-010	3.00
C6	Cap., mylar 0.001 mfd, ±10%, 200 vdc	CGK-10-004	.21
C8	Cap., elect., 400 mfd, -10 +100%, 100 vdc	CBR-40-044	2.68
CR8	Rectifier	FBL-00-036	.60
CR9 Thru CR11	Same as CR8		
Q5	Transistor, NPN	FBN-L108	2.52
Q8	Transistor, NPN	FBN-36487	5.63
R1	Res., var., wirewound, 3,300 ohms, ±5%, 5w	DNS-33-035 or	2.00
R2	Res., wirewound, 8,000 ohms, ±3%, 3w	DNS-33-054	2.50
		DFS-80-054	1.03
R14	Res., wirewound, 0.56 ohms, ±5% 3w	DFM-56-042	.83
R16	Res., comp., 820 ohms, ±10%, 1/2w	DEB-8211	.12
R18	Res., film, 10,000 ohms, ±5%, 1/2w	DCT-10-008	.25
T1	Transformer	ABA-B48	19.50

MODELS LMB-0-7, B-0-14, B-0-32

COMMON PARTS

C1	Cap., mylar, 0.033 mfd ±10%, 400 vdc	CGL-33-006	.27
C2	Cap., mylar, 0.22 mfd ±10%, 100 vdc	CGM-22-003	.33
C4	Cap., elect., 3.0 mfd -10 +75%, 100 vdc	CBN-30-015	1.58
C5	Cap., mylar, 0.01 mfd ±10%, 200 vdc	CGL-10-002	.36
C7*	Cap., elect., 140 mfd -10 +100%, 30 vdc	CBR-14-030	2.25
C9	Cap., mylar, 0.018 mfd ±10%, 200 vdc	CGL-18-005	.24
C10	Same as C9		
C11 Thru C29	Not assigned		

COMMON PARTS (Cont)

MODELS LMB-0-7, B-0-14, B-0-32 (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
C30	Cap., mylar, 0.0068 mfd ±10%, 200 vdc	CGK-68-001	\$.34
C31, C32	Not assigned		
C33	Cap., mylar, 0.001 mfd ±10%, 200 vdc	CGK-10-004	.21
CR1*	Rectifier, zener diode	FBM-Z104	4.35
CR2	Rectifier	FBL-00-030	1.40
CR3 Thru CR5	Not assigned		
CR6	Rectifier, zener diode	FBM-Z103	4.87
CR7	Same as CR2		
CR8	Not assigned		
CR10	Not assigned		
CR12	Rectifier	FBL-00-047	.88
Q1	Transistor, NPN	FBN-L110	3.25
Q2	Same as Q1		
Q3	Same as Q1		
Q4	Not assigned		
Q6, Q7	Not assigned		
R2	Not assigned		
R3	Res., ww, 1,100 ohms ±3%, 2w	DFS-11-061	.60
R4*	Res., film, 15,000 ohms ±2%, 1/2w	DCT-15-013	.30
R5	Res., film, 220 ohms ±2%, 1/2w	DCR-22-005	.30
R6	Res., comp., 180,000 ohms ±10%, 1/2w	DEB-1841	.12
R7	Res., film, 3,900 ohms ±5%, 1/2w	DCS-39-014	.25
R8	Res., comp., 4,700 ohms ±10%, 1/2w	DEB-4721	.12
R9	Res., comp., 150 ohms ±10%, 1/4w	DCB-1511	.10
R10	Res., comp., 2,200 ohms ±10%, 1/2w	DEB-2221	.12
R11, R12	Not assigned		
R13*	Res., ww, 600 ohms ±3%, 3w	DFR-60-005	.89
R15	Not assigned		
R17	Res., var., ww, 1,200 ohms ±10%, 1-1/2w	DNS-12-026	1.25
R18, R19	Not assigned		
R22	Res., comp., 100 ohms ±10%, 1/2w	DEB-1011	.12

*This component not used on units with "Y" option

UNIQUE PARTS

MODEL LMB-0-7

C3	Cap., elect., 500 mfd -10 +100%, 20 vdc	CBR-50-037	2.27
C6	Cap., mylar, 0.01 mfd ±10%, 200 vdc	CGL-10-002	.36
C8	Cap., elect., 3,600 mfd -10 +100%, 20 vdc	CBS-36-044	2.36
CR9	Rectifier	FBL-00-047	.88
CR11	Same as CR9		
Q5	Transistor, NPN	FBN-L113	1.96
Q8	Transistor, NPN	FBN-36972	6.50
R1	Res., var., ww, 2,200 mfd ±5%, 5w	DNS22-023 or	1.75
		DNS-22-053	2.50
R14	Res., ww, 0.39 ohms ±5%, 3w	DFM-39-043	1.00

UNIQUE PARTS (Cont)

MODEL LMB-0-7 (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
R16	Res., comp., 820 ohms ±10%, 1/2w	DEB-8211	\$.12
R20	Res., comp., 820 ohms ±10%, 1w	DGB-8211	.08
R21	Not assigned		
T1	Transformer	ABA-B5	19.50

MODEL LMB-0-14

C3	Cap., elect., 280 mfd -10 +100%, 35 vdc	CBR-28-038	1.77
C6	Cap., mylar, 0.01 mfd ±10%, 200 vdc	CGL-10-002	.36
C8	Cap., elect., 2, 100 mfd -10 +100%, 35 vdc	CBS-21-043	3.67
CR9	Rectifier	FBL-00-047	.88
CR11	Same as CR9		
Q5	Transistor, NPN	FBN-L113	1.96
Q8	Transistor, NPN	FBN-36972	6.50
R1	Res., var., ww, 3,300 ohms ±5%, 5w	DNS-33-035 or DNS-33-054	2.00 2.50
R14	Res., ww, 0.56 ohm ±5%, 3w	DFM-56-042	.66
R16	Res., comp., 820 ohms ±10%, 1/2w	DEB-8211	.12
R20	Res., comp., 820 ohms ±10%, 1w	DGB-8211	.08
R21	Not assigned		
T1	Transformer	ABA-B014	19.50

MODEL LMB-0-32

C3	Cap., elect., 160 mfd -10 +100%, 60 vdc	CBR-16-039	2.00
C6	Cap., mylar, 0.018 mfd ±10%, 200 vdc	CGL-18-005	.24
C8	Cap., elect., 100 mfd -10 +100%, 60 vdc	CBS-11-042	3.67
CR9	Rectifier	FBL-00-036	.60
CR11	Same as CR9		
Q5	Transistor, NPN	FBN-L109	2.75
Q8	Transistor, NPN	FBN-36487	5.63
R1	Res., var., ww, 9,000 ohms ±5%, 5w	DNS-90-025 or DNS-90-051	2.00 2.50
R14	Res., ww, 1.0 ohms ±3%, 3w	DFN-10-041	.60
R16	Res., comp., 1,000 ohms ±10%, 1/2w	DEB-1021	.12
R20	Res., ww, 2,000 ohms ±5%, 3w	DFS-20-038	.50
R21	Same as R20		
T1	Transformer	ABA-B032	19.50

MODELS LM-B100, LM-B120, LM-B150

COMMON PARTS

C1	Cap., mylar, 0.033 mfd ±10%, 400 vdc	CGL-33-006	.27
C2	Cap., mylar, 0.15 mfd ±10%, 200 vdc	CGM-15-005	.40
C3	Cap., elect., 25 mfd -10% +100%, 250 vdc	CBP-25-016	1.48
C4	Cap., elect., 3.5 mfd -10% +100%, 300 vdc	CBN-35-018	1.12
C5	Cap., mylar, 0.01 mfd ±10%, 200 vdc	CGL-10-002	.36

MODELS LM-B100, LM-B120, LM-B150 (Cont)

COMMON PARTS (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
C6	Same as C5		
C7*	Cap., elect., 140 mfd, -10% +100%, 30 vdc	CBR-14-030	\$ 2.25
C8	Cap., elect., 200 mfd -10% +100%, 250 vdc	CBR-20-045	2.68
C9	Not assigned		
C10	Not assigned		
C11	Same as C1		
C12	Not assigned		
Thru C29			
C30	Cap., mylar, 0.0033 mfd ±10%, 100 vdc	CGK-33-007	.18
C31	Not assigned		
C32	Cap., mylar, 0.001 mfd ±10%, 200 vdc	CGK-10-004	.21
C33	Same as C32		
CR1*	Rectifier, zener diode	FBM-Z104	4.35
CR2	Rectifier	FBL-00-030	1.40
CR3	Same as CR2		
CR4,	Not assigned		
CR5			
CR6	Rectifier, zener diode	FBM-Z103	4.87
CR7	Same as CR2		
CR12	Rectifier	FBL-00-033	1.65
Q1	Transistor, NPN	FBN-L110	3.25
Q2,	Same as Q1		
Q3			
Q4	Not assigned		
Q6,	Not assigned		
Q7			
Q8	Transistor, NPN	FBN-38021	4.75
Q9	Same as Q8		
R1	Res., var., ww, 9,000 ohms ±5%, 5w	DNS-90-025 or DNS-90-051	2.00 2.50
R3	Res., ww, 1,200 ohms, ±3%, 2w	DFS-12-030	.90
R4*	Res., film, 15,000 ohms ±2%, 1/2w	DCT-15-013	.30
R5	Res., film, 220 ohms ±2%, 1/2w	DCR-22-005	.30
R6	Res., comp., 180,000 ohms ±10%, 1/2w	DEB-1841	.12
R7	Res., film, 3,900 ohms ±5%, 1/2w	DCS-39-014	.25
R8	Res., comp., 4,700 ohms ±10%, 1/2w	DEB-4721	.12
R9	Res., comp., 150 ohms ±10%, 1/4w	DCB-1511	.10
R10	Res., comp., 3,900 ohms ±10%, 1/2w	DEB-3921	.12
R11	Res., comp., 22,000 ohms, ±10%, 1/2w	DEB-2231	.12
R12	Res., comp., 47 ohms, ±10%, 1/2w	DEB-4701	.12
R13*	Res., ww, 600 ohms ±3%, 3w	DFR-60-005	.89
R14	Res., ww, 6.0 ohms ±3%, 3w	DFN-60-054	.83
R15	Same as R14		
R16	Res., comp., 1,800 ohms ±10%, 1/4w	DCB-1821	.10
R17	Res., var., ww, 1,200 ohms ±10%, 1-1/2w	DNS-12-026	1.25
R19	Not assigned		
Thru R21			

*This part not used on units with "Y" option.

COMMON PARTS (Cont)

MODELS LM-B100, LM-B120, LM-B150 (Cont)

<u>CIRC. DESIG.</u>	<u>DESCRIPTION</u>	<u>LAMBDA NO.</u>	<u>UNIT PRICE</u>
R22	Res., comp., 220 ohms ±10%, 1/2w	DEB-2211	\$.12
*This component not used on units with "Y" option			
<u>UNIQUE PARTS</u>			
<u>MODEL LM-B100</u>			
CR8 Thru CR11	Rectifier	FBL-00-033	1.65
Q5	Transistor, NPN	FBN-L108	2.52
R2	Res., ww, 16,000 ohms ±3%, 5w	DFT-16-039	.85
R18	Res., film, 39,000 ohms ±5%, 1/2w	DCT-39-015	.30
T1	Transformer	ABA-B100	19.50
<u>MODEL LM-B120</u>			
CR8 Thru CR11	Rectifier	FBL-00-033	1.65
Q5	Transistor, NPN	FBN-L108	2.52
R2	Res., ww, 20,000 ohms, ±3%, 5w	DFT-20-040	.85
R18	Res., film, 43,000 ohms ±5%, 1/2w	DCT-43-016	.30
T1	Transformer	ABA-B120	19.50
<u>MODEL LM-B150</u>			
CR8 Thru CR11	Rectifier	FBL-00-064	.75
Q5	Transistor, NPN	FBN-L115	2.25
R2	Res., ww, 26,000 ohms ±3%, 5w	DFT-26-041	1.20
R18	Res., film, 56,000 ohms ±5%, 1w	DCT-56-017	.25
T1	Transformer	ABA-B150	19.50
<u>PARTS FOR MODEL LMB-0-60</u>			
C1	Cap., mylar, 0.033 mfd ±10%, 400 vdc	CGL-33-006	.27
C2	Cap., mylar, 0.22 mfd ±10%, 100 vdc	CGM-22-003	.33
C3	Cap., elect., 90 mfd -10 +100%, 85 vdc	CBP-90-010	3.00
C4	Cap., elect., 3.0 mfd -10 +75%, 100 vdc	CBN-30-015	1.58
C5	Cap., mylar, 0.01 mfd ±10%, 200 vdc	CGL-10-002	.36
C6	Cap., mylar, 0.018 mfd ±10%, 200 vdc	CGL-18-005	.24
C7*	Cap., elect., 140 mfd -10 +100%, 30 vdc	CBR-14-030	2.25
C8	Cap., elect., 400 mfd -10 +100%, 100 vdc	CBR-40-044	2.68
C9, C10	Not assigned		
C11	Same as C6		
C12 Thru C29	Not assigned		
C30	Cap., mylar, 0.0068 mfd ±10%, 200 vdc	CGK-68-001	.34
C31, C32	Not assigned		

PARTS FOR MODEL LMB-0-60 (Cont)

<u>CIRC. DESIG.</u>	<u>DESCRIPTION</u>	<u>LAMBDA NO.</u>	<u>UNIT PRICE</u>
C33	Cap., mylar, 0.001 mfd ±10%, 200 vdc	CGK-10-004	\$.21
CR1*	Rectifier, zener diode	FBM-Z104	4.35
CR2	Rectifier	FBL-00-030	1.40
CR3 Thru CR5	Not assigned		
CR6	Rectifier, zener diode	FBM-Z103	4.87
CR7	Same as CR2		
CR8 Thru CR11	Rectifier	FBL-00-036	.60
CR12 Thru CR15	Same as CR2		
Q1	Transistor, NPN	FBN-L110	3.25
Q2	Same as Q1		
Q3	Same as Q1		
Q4	Not assigned		
Q5	Transistor, NPN	FBN-L108	2.52
Q6, Q7	Not assigned		
Q8	Transistor, NPN	FBN-35902	9.90
R1	Res., var., ww, 13,000 ohms ±5%, 5w	DNT-13-008 or DNT-13-031	2.48 2.50
R2	Not assigned		
R3	Res., ww, 1,100 ohms ±3%, 2w	DFS-11-061	.60
R4*	Res., film, 15,000 ohms ±2%, 1/2w	DCT-15-013	.30
R5	Res., film, 220 ohms ±2%, 1/2w	DCR-22-005	.30
R6	Res., comp., 180,000 ohms ±10%, 1/2w	DEB-1841	.12
R7	Res., film, 3,900 ohms ±5%, 1/2w	DCS-39-014	.25
R8	Res., comp., 4,700 ohms ±10%, 1/2w	DEB-4721	.12
R9	Res., comp., 150 ohms ±10%, 1/4w	DCB-1511	.10
R10	Res., comp., 2,200 ohms ±10%, 1/2w	DEB-2221	.12
R11, R12	Not assigned		
R13*	Res., ww, 600 ohms ±3%, 3w	DFR-60-005	.89
R14	Res., ww, 1,500 ohms ±3%, 3w	DFN-15-042	.60
R15	Not assigned		
R16	Res., comp., 1,000 ohms ±10%, 1/2w	DEB-1021	.12
R17	Res., var., ww, 1,200 ohms ±10%, 1-1/2w	DNS-12-026	1.25
R18	Not assigned		
R19	Not assigned		
R20	Res., ww, 4,500 ohms ±5%, 3w	DFS-45-044	.87
R21	Same as R20		
R22	Res., comp., 100 ohms ±10%, 1/2w	DEB-1011	.12
T1	Transformer	ABA-B60	19.50
*This component not used on units with "Y" option			
<u>PARTS FOR MODEL LM-B60</u>			
C1	Cap., mylar, 0.033 mfd ±10%, 400 vdc	CGL-33-006	.27
C2	Cap., mylar, 0.22 mfd ±10%, 100 vdc	CGM-22-003	.33

PARTS FOR MODEL LM-B60 (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
C3	Cap., elect., 90 mfd -10 +100%, 85 vdc	CBP-90-010	\$ 3.00
C4	Cap., elect., 3.0 mfd -10 +75%, 100 vdc	CBN-30-015	1.50
C5	Cap., mylar, 0.01 mfd ±10%, 200 vdc	CGL-10-002	.36
C6	Cap., mylar, 0.018 mfd ±10%, 200 vdc	CGL-18-005	.24
C7*	Cap., elect., 140 mfd -10 +100%, 30 vdc	CBR-14-030	2.25
C8	Cap., elect., 400 mfd -10 +100%, 100 vdc	CBR-40-044	2.68
C9	Not assigned		
C10	Not assigned		
C11	Same as C6		
C12	Cap., mylar, 0.001 mfd ±10%, 200 vdc	CGK-10-004	.21
C13 - C29	Not assigned		
C30	Cap., mylar, 0.0033 mfd ±10%, 100 vdc	CGK-33-007	.18
CR1*	Rectifier, zener diode	FBM-Z104	4.35
CR2	Rectifier	FBL-00-030	1.40
CR3	Same as CR2		
CR4	Not assigned		
CR5	Not assigned		
CR6	Rectifier, zener diode	FBM-Z103	4.87
CR7	Same as CR2		
CR8	Rectifier	FBL-00-036	.60
CR9	Same as CR8		
Thru CR11			
Q1	Transistor, NPN	FBN-L110	3.25
Q2	Same as Q1		
Q3	Same as Q1		
Q4	Not assigned		
Q5	Transistor, NPN	FBN-L108	2.52
Q6	Not assigned		
Q7	Not assigned		
Q8	Transistor, NPN	FBN-35902	9.90
R1	Res., var., ww, 4,500 ohms ±5%, 5w	DNS-45-024 or DNS-45-059	1.75 2.50
R2	Res., ww, 10,000 ohms ±3%, 5w	DFT-10-042	.65
R3	Res., ww, 1,200 ohms ±3%, 2w	DFS-12-030	.90
R4*	Res., film, 15,000 ohms ±2%, 1/2w	DCT-15-013	.30
R5	Res., film, 220 ohms ±2%, 1/2w	DCR-22-005	.30
R6	Res., comp., 180,000 ±10%, 1/2w	DEB-1841	.12
R7	Res., film, 3,900 ohms ±5%, 1/2w	DCS-39-014	.25
R8	Res., comp., 4,700 ohms ±10%, 1/2w	DEB-4721	.12
R9	Res., comp., 150 ohms ±10%, 1/4w	DCB-1511	.10
R10	Res., comp., 3,900 ohms ±10%, 1/2w	DEB-3921	.12
R11	Res., comp., 22,000 ohms ±10%, 1/2w	DEB-2231	.12
R12	Res., comp., 47 ohms ±10%, 1/2w	DEB-4701	.12
R13*	Res., ww, 600 ohms ±3%, 3w	DFR-60-005	.89
R14	Res., ww, 1.0 ohms ±3%, 3w	DFN-10-014	.67
R15	Not assigned		

PARTS FOR MODEL LM-B60 (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
R16	Res., comp., 1,000 ohms ±10%, 1/2w	DEB-1021	\$.12
R17	Res., var., ww, 1,200 ohms ±10%, 1-1/2w	DNS-12-026	1.25
R18	Res., film, 15,000 ohms ±2%, 1/2w	DCT-15-013	.30
R19	Not assigned		
Thru R21			
R22	Res., comp., 100 ohms ±10%, 1/2w	DEB-1011	.12
T1	Transistor	ABA-B60	19.50

*This component not used on units with "Y" option

PARTS FOR "MP" OPTION
MODELS MP-3, MP-5, P-3, P-5

DS1	Pilot light assembly, ALL	HRD 00-007	.83
F1	Fuse, 3 AG, "SLO-BLO", 1.5 amperes, LM-217 thru LM-220, LM-B0-7 thru B0-60	FFC 01-500	.23
F1	Fuse, 3 AG, "SLO-BLO", 2.0 amperes, LM-B3 thru LM-B150	FFC 02-000	.23
XF1	Fuseholder, ALL	HRK 00-005	.50
M1*	Meter, volts, D.C., 0-5 vdc, LM-B3 thru LM-B4P5	EBN 50-003	14.40
M1*	Meter, volts D.C., 0-8 vdc, LM-B5, LM-B6, LMB-0-7	EBN 80-005	12.00
M1*	Meter, volts D.C., 0-10 vdc, LM-B8	EBP 10-016	18.00
M1*	Meter, volts, D.C., 0-15 vdc, LM217, LM-B10, LM-B12, LMB-0-14	EBP 15-017	18.00
M1*	Meter, volts, D.C., 0-20 vdc, LM-B15, LM-B18	EBP 20-014	18.00
M1*	Meter, volts, D.C., 0-25 vdc, LM-218, LM-B20	EBP 25-018	18.00
M1*	Meter, volts, D.C., 0-40 vdc, LM-219, LM-B24, B28, B36, LMB-0-32	EBP 40-013	18.00
M1*	Meter, volts, D.C., 0-60 vdc, LM220, LM-B48, LMB-0-60	EBP 60-015	18.00
M2*	Meter, amperes, D.C., 0-5 amperes, LM-B3 thru LM-B8	EDN 50-021	18.00
M2*	Meter, amperes, D.C., 0-3 amperes, LM-217, LM-B10, B12, B15, LMB-0-7	EDN 30-019	18.00
M2*	Meter, amperes, D.C., 0-2 amperes, LM-B18, LM-B20, LMB-0-14	EDN 20-022	18.00
M2*	Meter, amperes, D.C., 0-1.5 ampere, LM-218, 219, LM-B24, B28, B36	EDN 15-020	18.00
M2*	Meter, amperes, D.C., 0-1 ampere, LM-220, LM-B48, LMB-0-32, LM-B60	EDN 10-014	18.00
R1	Res., var., ww, 2,200 ohms ±5%, 5w, LM-217, LM-B10 thru LM-B28, LMB-0-7	DNS 22-023 or DNS-22-053	1.75 2.50

PARTS FOR "MP" OPTION (Cont)
MODELS MP-3, MP-5, P-3, P-5 (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
R1	Res., var., ww, 4,500 ohms $\pm 5\%$, 5w, LM-218, LM-219, LM-B60	DNS 45-024 or DNS 45-059	\$1.75 2.50
R1	Res., var., ww, 9,000 ohms $\pm 5\%$, 5w, LM-220, LMB-0-32, LM-B100 thru B150	DNS 90-025 or DNS 90-051	2.00 2.50
R1	Res., var., ww, 300 ohms $\pm 5\%$, 5w, LM-B3	DNR 30-018	1.95
R1	Res., var., ww, 600 ohms $\pm 5\%$, 5w, LM-B3P3 thru LM-B6	DNR 60-019 or DNR 60-026	2.25 2.50
R1	Res., var., ww, 1,000 ohms $\pm 5\%$, 5w, LM-B8	DNS 10-032	1.95
R1	Res., var., ww, 3,300 ohms $\pm 5\%$, 5w, LM-B36, LM-B48, LMB-0-14	DNS 33-035 or DNS 33-054	2.00 2.50
S1**	Switch, SPST, ALL	FDA 11-001	.94
S1+	Switch, SPST, ALL	FDA 11-022	2.50
C1, C2	Cap., tant., 2.5 mfd -15 +75%, 100 vdc, ALL	CBN-25-010	1.80
M1*	Meter, volts, D.C., 0-80 vdc, LM-B60	EBP-80-019	18.00
M1*	Meter, volts, D.C., 0-120 vdc, LM-B100	EBR-12-075	18.00
M1*	Meter, volts, D.C., 0-150 vdc, LM-B120	EBR-15-076	18.00
M1*	Meter, volts, D.C., 0-200 vdc, LM-B150	EBR-20-077	18.00
M2*	Meter, amperes, D.C., 0-0.3 amperes, LM-B120, LM-B150	EDM-30-035	17.40
M2*	Meter, amperes, D.C., 0-0.5 amperes, LM-B100, LMB-0-60	EDM-50-034	18.00
R1	Res., var., ww, 13,000 ohms $\pm 5\%$, 5w, LMB-0-60	DNT-13-031	2.50

*This part only used on MP-3, MP-5

**This part only used on MP-3, P-3

+This part only used on MP-5, P-5

PARTS FOR "OV" OPTION
MODELS LMOV-1, LMOV-2, LMOV-3

COMMON PARTS

C1	Cap., mylar, 0.01 mfd $\pm 20\%$, 80 vdc	CGL-10-008	.25
Q1	Transistor, NPN	FBN-L102	2.40
R3	Res., film, 200 ohms $\pm 5\%$, 1/2w	DCR-20-010	.20
R4	Res., thermistor, 425 ohms $\pm 5\%$, 1-1/4w	DKR-43-001	1.52
R5	Res., comp., 1,200 ohms $\pm 10\%$, 1/2w	DEB-1221	.12
R6	Same as R5		
R8	Res., comp., 15,000 ohms $\pm 10\%$, 1/2w	DEB-1531	.12
R10	Same as R5		
SCR1	Rectifier, silicon, con- trolled	FBP-00-009	\$ 5.50

UNIQUE PARTS

MODEL LMOV-1

Q2	Transistor, PNP	FBN-L103	1.76
R1	Res., var., ww, 2,000 ohms $\pm 10\%$, 1w	DNS-20-034	3.00
R2	Res., film, 560 ohms $\pm 2\%$, 1/2w	DCR-56-002	.65

UNIQUE PARTS (Cont)
MODEL LMOV-1 (Cont)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.	UNIT PRICE
R7	Res., comp., 33 ohms $\pm 5\%$, 1/4w	DCB-3305	\$.15
R9	Not assigned		

MODEL LMOV-2

Q2	Transistor, PNP	FBN-L103	1.76
R1	Res., var., ww, 5,000 ohms $\pm 10\%$, 1w	DNS-50-036	3.15
R2	Res., film, 1,470 ohms $\pm 1\%$, 1/2w	DCS-15-031	.30
R7	Res., comp., 33 ohms $\pm 5\%$, 1/4w	DCB-3305	.15
R9	Not assigned		

MODEL LMOV-3

Q2	Transistor, PNP	FBN-L114	3.50
R1	Res., var., ww, 20,000 ohms $\pm 10\%$, 1w	DNT-20-010	3.25
R2	Res., film, 4,700 ohms $\pm 2\%$, 1/2w	DCS-47-028	.30
R7	Res., comp., 39 ohms $\pm 5\%$, 1/4w	DCB-3905	.15
R9	Res., comp., 22 ohms $\pm 10\%$, 1/2w	DEB-2201	.12

PARTS FOR "Y" OPTION

C107	Cap., elect., 40 mfd, 35 vdc	CBP-40-014	1.68
CR1	Rectifier, zener diode	FBM-Z107	3.75
CR101	Rectifier, zener diode	FBM-Z104	4.35
Q101	Transistor, NPN	FBN-L109	2.75
R4	Res., comp., 220,000 ohms $\pm 10\%$, 1/2w	DEB-2241	.12
R101	Res., film, 6,800 ohms $\pm 2\%$, 1/4w	DCS-68-032	.30
R102	Res., film, 220 ohms $\pm 2\%$, 1/4w	DCR-22-014	.30

PARTS FOR "T" OPTION

All "B" Package Models except FI changes on LM-B8 thru LM-B150 and LM-220 The following parts change and a resistor is added in series to DS-1 of "MP" option.			
C1	Cap., mylar, 0.033 mfd $\pm 10\%$, 600 vdc	CGL-33-014	.35
F1	Fuse, "Slo-Blo" 0.75 amps 250 v	FFG-00-750	.25
T1	Transformer	Add suffix "T" to reg. T1 No.	Same as reg. T1
DS1- Res.	Res., comp., 120 K $\pm 10\%$	DEB-1241	.12

MODELS LM-B8 THRU LM-B150 AND LM-220

All changes and additions apply except F1 is;			
F1	Fuse, "Slo-Blo", 1.0 amps 250 v	FFG-01-000	.25

PARTS FOR "R" OPTION

Variable resistor R1 and transformer T1 change on all "B" package models with suffix "R". Part no. changes for R1 are listed here. For transformer T1 used on these models see standard "B" model parts lists for the standard transformer part no. and add suffix "R" to the part no. Price for T1 does not change.

<u>CIRC.</u> <u>DESIG.</u>	<u>DESCRIPTION</u>	<u>LAMBDA</u> <u>NO.</u>	<u>UNIT</u> <u>PRICE</u>
-------------------------------	--------------------	-----------------------------	-----------------------------

MODELS LM-217, LM-B10—LM-B28, LMB-0-7

R1	Res., var., ww, 2,200 ohms ±5%, 5w	DNS-22-070	\$ 6.25
----	---------------------------------------	------------	---------

MODELS LM-218, LM-219, LM-B60

R1	Res., var., ww, 4,500 ohms ±5%, 5w	DNS-45-072	6.25
----	---------------------------------------	------------	------

MODELS LM-220, LM-B100—LM-B150, LMB-0-32

R1	Res., var., ww, 9000 ohms ±5%, 5w	DNS-90-073	6.25
----	--------------------------------------	------------	------

MODEL LM-B3

R1	Res., var., ww, 300 ohms ±5%, 5w	DNR-30-031	6.25
----	-------------------------------------	------------	------

MODELS LM-B3P3—LM-B6

R1	Res., var., ww, 600 ohms ±5%, 5w	DNR-60-032	6.25
----	-------------------------------------	------------	------

MODEL LM-B8

R1	Res., var., ww, 1000 ohms ±5%, 5w	DNS-10-069	6.25
----	--------------------------------------	------------	------

MODELS LM-B36, LM-B48, LMB-0-14

R1	Res., var., ww, 3,300 ohms ±5%, 5w	DNS-33-071	6.25
----	---------------------------------------	------------	------

MODEL LMB-0-60

R1	Res., var., ww, 13,000 ohms ±5%, 5w	DNT-13-035	6.25
----	--	------------	------

PARTS FOR V OPTION

All "B" Package Models with the "V" Option have the same part changes as listed for the "T" Option except for transformer T1 listed below

T1	Transformer	Add suffix "V" to reg. T1 No.	Same as reg. T1
----	-------------	----------------------------------	-----------------------

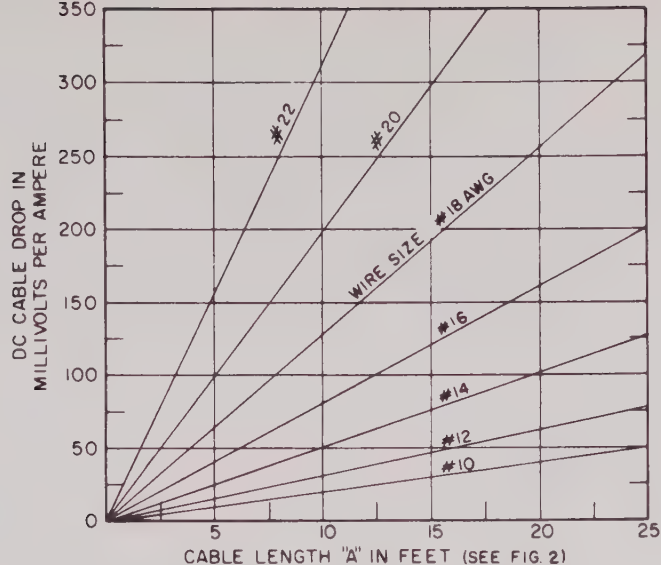


Figure 1. Cable Connection Chart


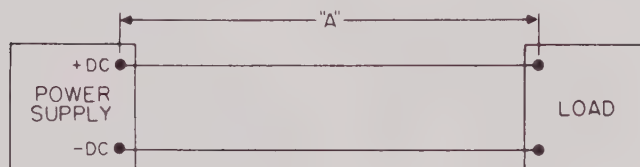



Figure 2. Cable Length "A" in Feet

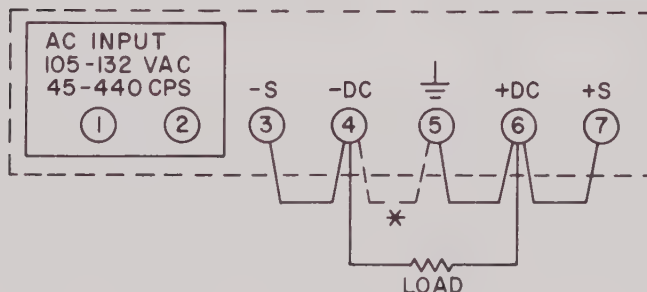

NOTE:

* FOR NEGATIVE GROUND, DISCONNECT JUMPER FROM TERMINALS 5 AND 6 AND RECONNECT TO TERMINALS 4 AND 5.

Figure 3. Local Sensing Connections

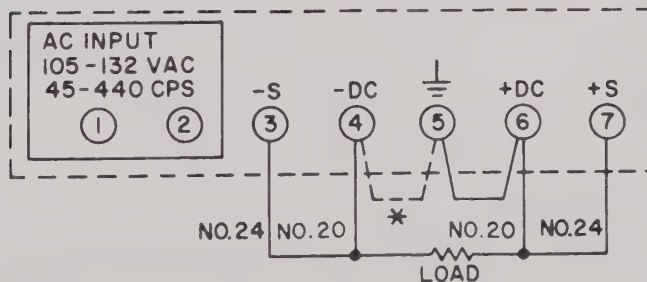

NOTE:

* FOR NEGATIVE GROUND, DISCONNECT JUMPER FROM TERMINALS 5 AND 6 AND RECONNECT TO TERMINALS 4 AND 5.

Figure 4. Remote Sensing Connections

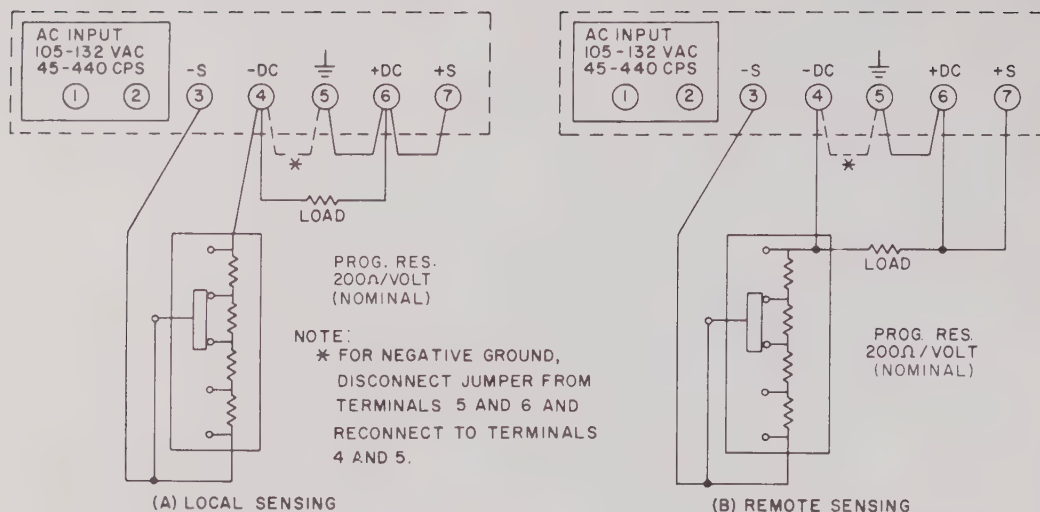


Figure 5. Programmed Voltage, with External Resistor

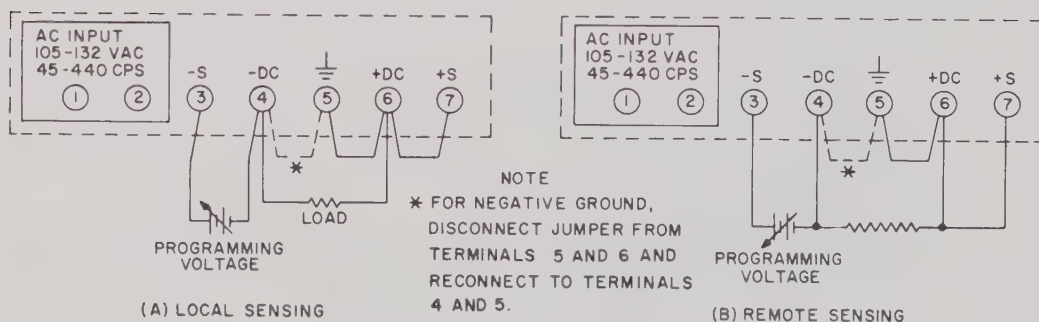


Figure 6. Programmed Voltage, with External Programming Voltage Source

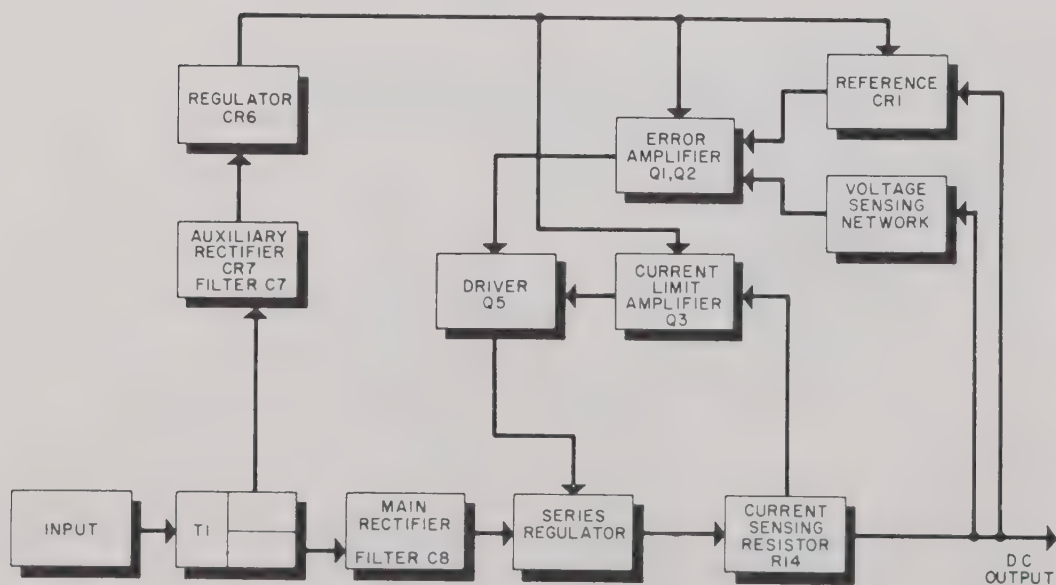


Figure 7. Typical Block Diagram

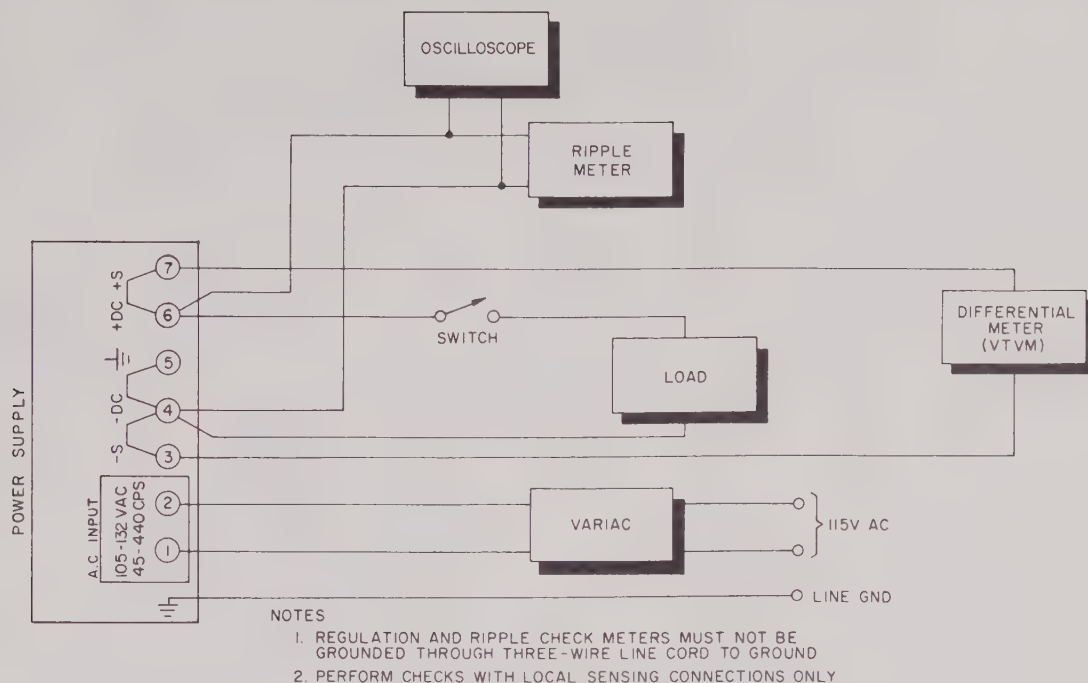


Figure 8. Test Connections for Performance Checks


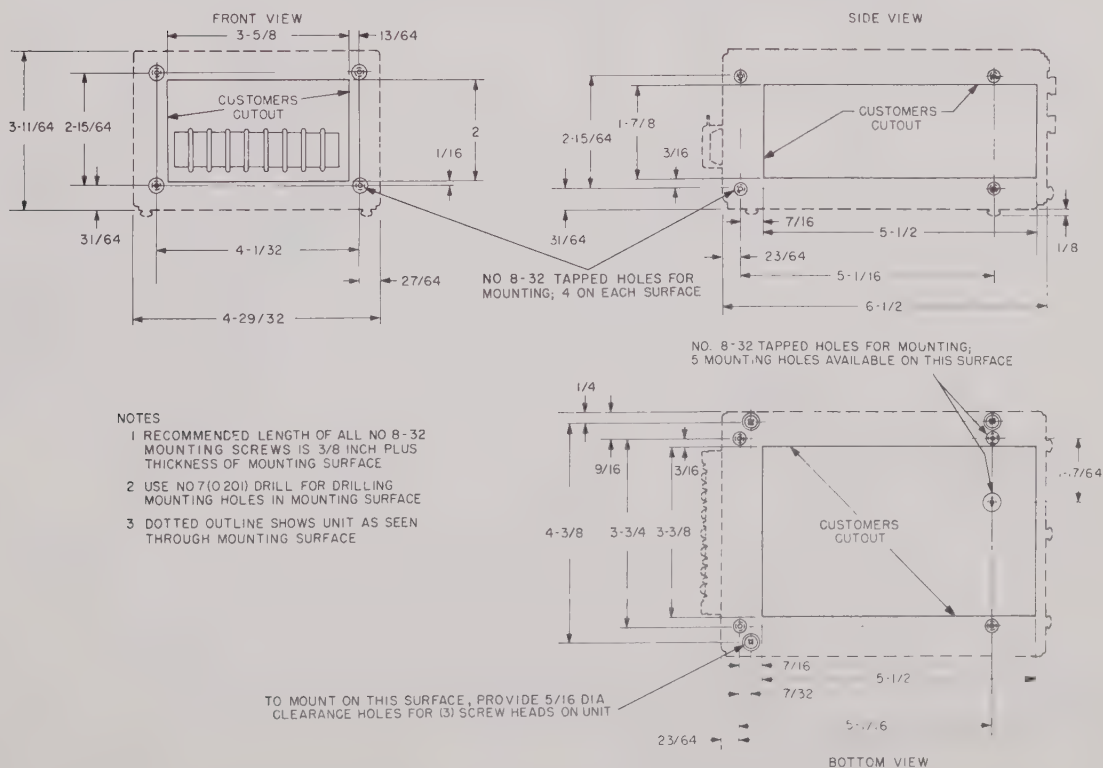


Figure 9. Recommended Mounting Cutouts

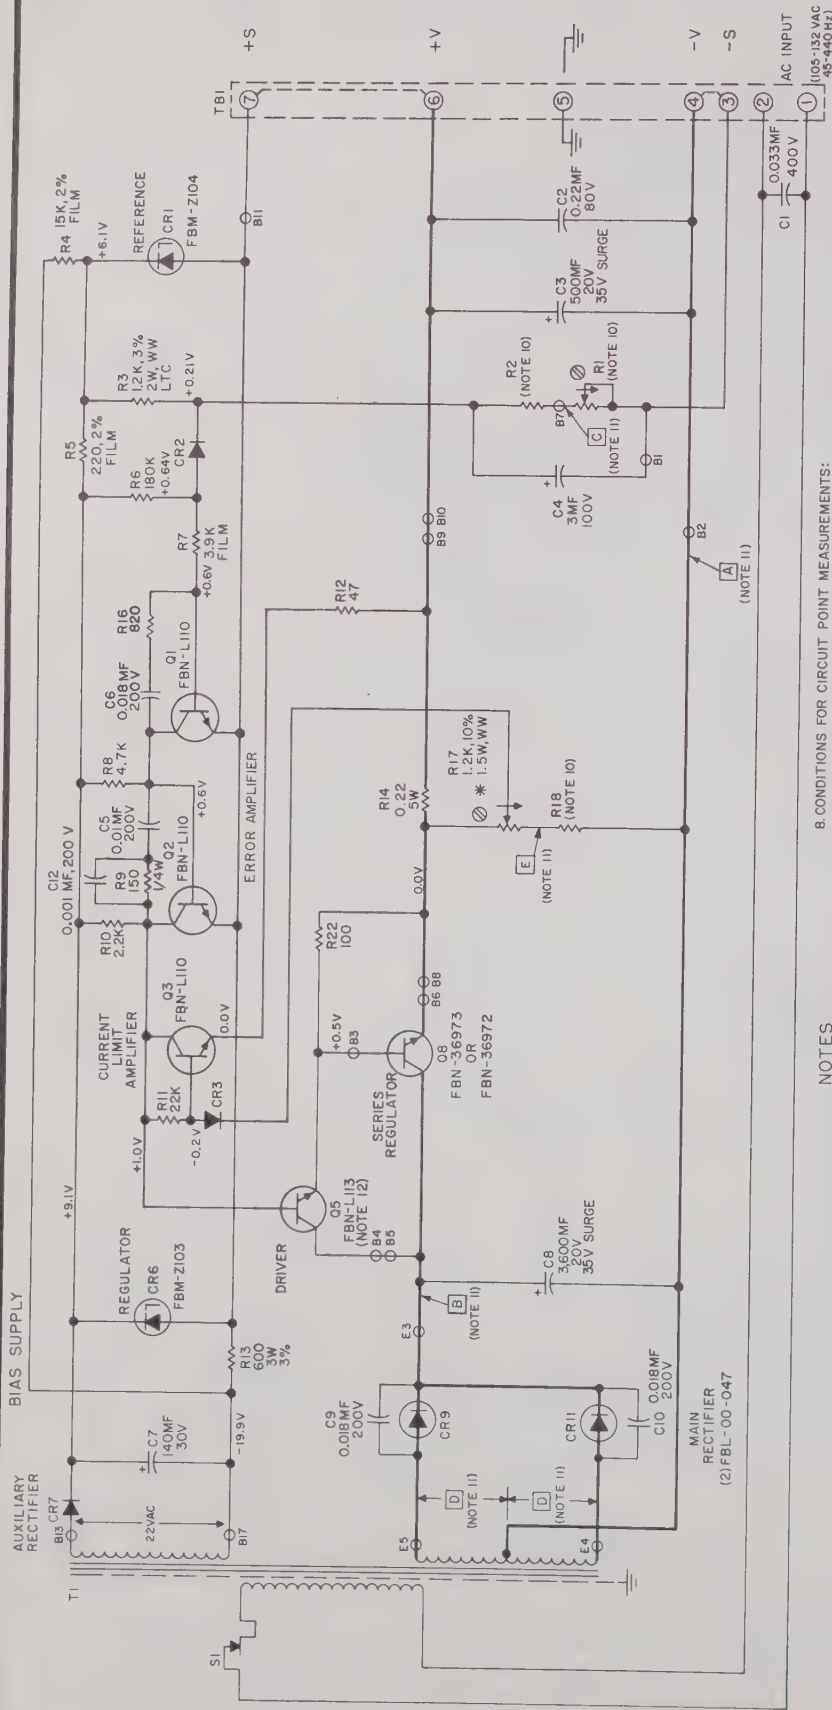

NOTES

1. RESISTOR VALUES ARE IN OHMS.
2. RESISTOR WATTAGE 1/2 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED.
3. RESISTOR TOLERANCES: COMP. $\pm 10\%$; WIREWOUND $\pm 5\%$; FILM $\pm 5\%$; UNLESS OTHERWISE NOTED.
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10% $+100\%$; MYLAR $\pm 10\%$; UNLESS OTHERWISE NOTED.
5. SYMBOLS:
 - ⊗ INDICATES CLOCKWISE ROTATION OF SHAFT.
 - ⊙ INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
 - ⊠ INDICATES CONNECTION TO CHASSIS.
 - ⊡ SEE INSTRUCTION MANUAL.
 - ⊢ LAMBDA PT. #FBL-00-Q30; USE IN4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
 - ⊣ INDICATES TERMINAL ON PRINTED WIRING BOARD "B" OR TERMINAL BOARD "E"
6. DESIGNATIONS ARE LAMBDA PART NUMBERS.
7. DERATE CURRENT 10% FOR 45-55 Hz OR 350-440 Hz.

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

DESIGNATIONS


Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

BEARING SERIAL NO. PREFIXES A-D

Q6	Q11
Q7	R15
Q4	R19-R21
CR4,5	
CR8	
CR10	

TABLE I
DATA REFERENCES FOR MODELS LM-B3 — LM-B5

Model	Voltage Range (VDC)	Max. Current (Amperes)				Schematic Voltage Measurement					Schematic Components		
		40°C	50°C	60°C	71°C	A (VDC)	B (VDC)	C (VDC)	D (VAC)	E (VDC)	R1	R2	R18
LM-B3	3.0±5%	3.8	3.3	2.6	1.6	-3.0	+13.9	-2.00	11.9	-3.0	±5% 5W	±3% 3W	±5% 1/2W
LM-B3P3	3.3±5%	3.8	3.3	2.6	1.6	-3.3	+15.4	-2.2	13.2	-3.3	600	430	JUMPER
LM-B3P6	3.6±5%	3.8	3.3	2.6	1.6	-3.6	+15.1	-2.2	13.2	-3.6	600	430	JUMPER
LM-B4	4.0±5%	3.8	3.3	2.6	1.6	-4.0	+14.3	-2.00	12.9	-4.0	600	600	JUMPER
LM-B4P5	4.5±5%	3.7	3.2	2.5	1.5	-4.5	+14.2	-2.80	13.2	-3.4	600	650	390
LM-B5	5.0±5%	3.7	3.2	2.5	1.5	-5.0	+13.7	-2.80	13.2	-2.8	600	650	910

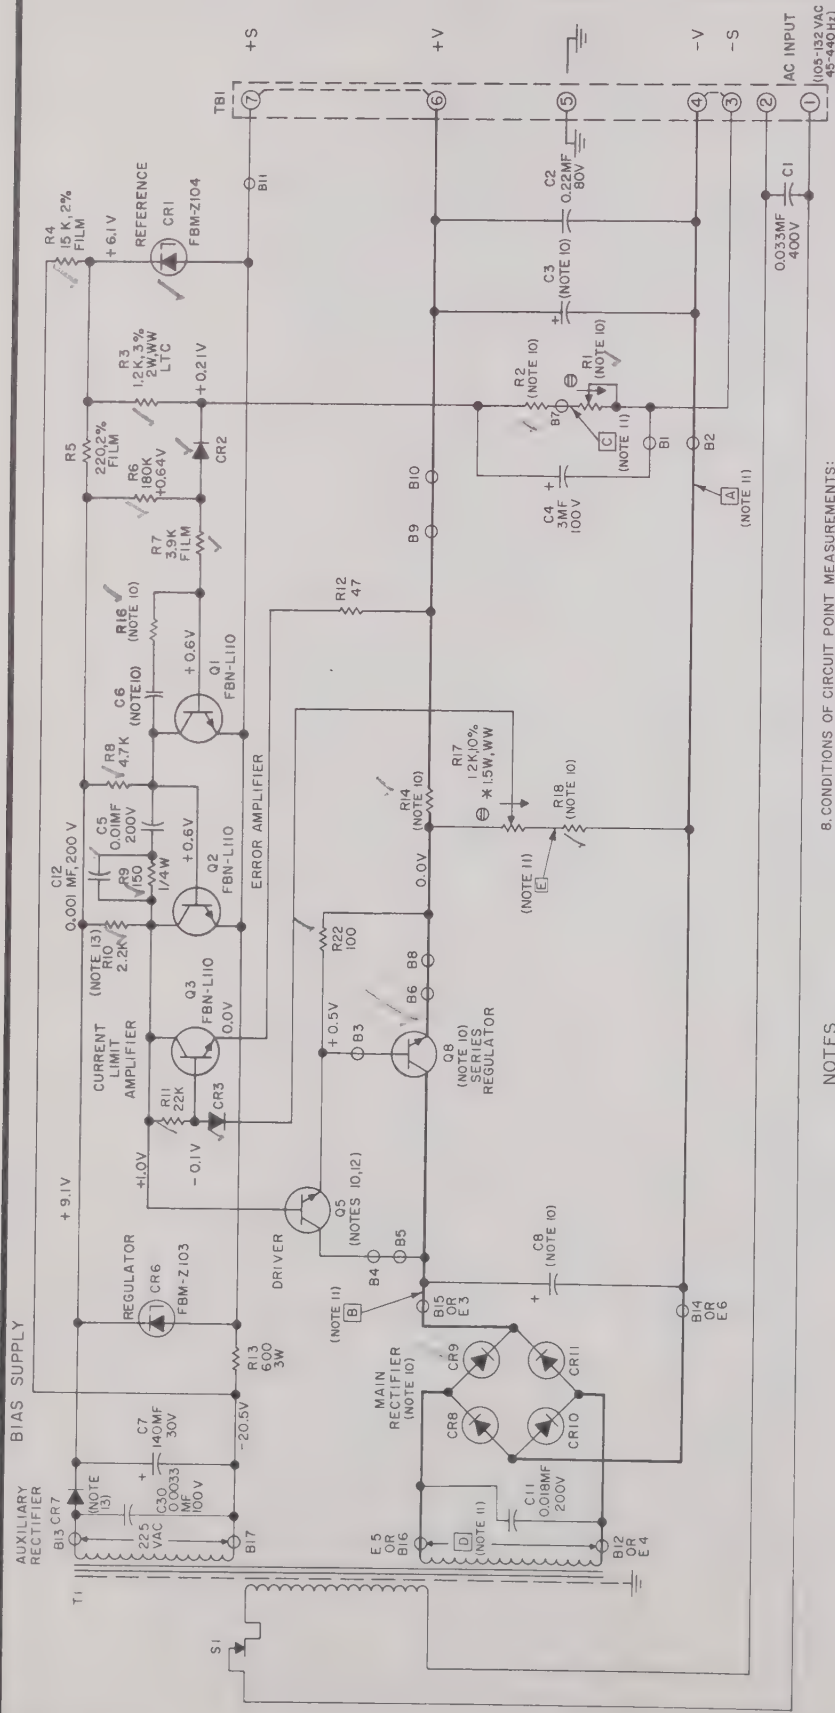

8. CONDITIONS OF CIRCUIT POINT MEASUREMENTS:

- INPUT: 115 VAC, 60 Hz; OUTPUT: NOM L. VDC, NO LOAD
 INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE
 DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS
 TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN
 +S (TERM. 7) B INDICATED POINTS UNLESS NOTED.
 9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW
 CORNING NO. 340 SILICONE GREASE.
 10. SEE TABLE I FOR COMPONENT VALUES.
 11. SEE TABLE I FOR VOLTAGE VALUES.
 12. IF Q5 IS REPLACED, ALWAYS RETAIN
 RADIATOR AND INSTALL WITH NEW
 TRANSISTOR. LM-B60 ONLY, R10
 IS 3.9 K, C30 IS ADDED.

NOTES

1. RESISTOR VALUES ARE IN OHMS.
2. RESISTOR WATTAGE 1/2 WATT; RESISTORS ABOVE 2
 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED.
3. RESISTOR TOLERANCES: COMP. $\pm 10\%$; WIREWOUND $\pm 5\%$;
 FILM $\pm 5\%$; UNLESS OTHERWISE NOTED.
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10% to $+100\%$;
 MYLAR $\pm 10\%$; UNLESS OTHERWISE NOTED.
5. SYMBOLS:
 * INDICATES CLOCKWISE ROTATION OF SHAFT.
 * INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
 * INDICATES CONNECTION TO CHASSIS.
 * INDICATES ACTUAL UNIT MARKING
 * SEE INSTRUCTION MANUAL.
 * LAMBDA PT. #FBL-00-030; USE IN 4002 DIODE
 FOR REPLACEMENT UNLESS OTHERWISE NOTED.
 * INDICATES TERMINAL ON PRINTED WIRING
 BOARD "B" OR TERMINAL BOARD "E".
 6. DESIGNATIONS ARE LAMBDA PART NUMBERS.
 7. DERATE CURRENT 10% FOR 45-55 Hz. FOR
 350-440 Hz SEE INSTRUCTION MANUAL.

REFERENCE DESIGNATIONS NOT USED	MODELS
Q6	LM-B6
C9	LM-B8
Q7	LM-B20
C10	LM-B24
Q4	LM-B28
	LM-B36
	LM-B48
R15	
R19-R21	
CR4-5	

THIS SCHEMATIC APPLIES TO UNITS
 BEARING SERIAL NO. PREFIXES A-D

SCHEMATIC DIAGRAM REGULATED POWER SUPPLY


LAMBDA
 ELECTRONICS CORP.
 MELVILLE
 NEW YORK

FOR WIRING OF POWER SUPPLY
 TO LOAD REFER TO SUPPLY-
 TO-LOAD WIRING DIAGRAMS.
 DOTTED CONNECTIONS SHOWN ON
 TBI INDICATE JUMPERS IN PLACE
 FOR LOCAL SENSING CONNECTION.

TABLE 1

DATA REFERENCES FOR MODELS LM-B6 — LM-B60

Model	Voltage Range (VDC)	Max. Current (Amps)			Schematic Voltage Measurement					Schematic Components											
		40°C	50°C	60°C	71°C	A (VDC)	B (VDC)	C (VDC)	D (VAC)	E (VDC)	C3	C6	C8	CR8-11 (FBL 00-)	Q5 (FBN-)	Q8 (FBN-)	R1 ±5% 5W	R2 ±3% 3W	R14 ±5% 5W	R16 ±10% 1/2W	R18 ±3% 5W
LM-B6	6±5%	3.2	2.9	2.4	1.4	-6.0	+14.3	-3.8	14.3	-3.4	500MF, 20V 35V SURGE	0.01 MF, 200V	3,600MF, 20V 35V SURGE	047	L113	36972 or 36973	600	800	0.22 ±5%, 5W	820	910
LM-B8	8±5%	3.2	2.9	2.4	1.4	-8.0	+15.7	-5.8	16.8	-3.2	500MF, 20V 35V SURGE	0.01 MF, 200V	3,600MF, 20V 35V SURGE	047	L113	36972 or 36973	1.0K	1.2K 2W	0.22 ±5%, 5W	820	1.8K
LM-B10	10±5%	2.7	2.5	2.2	1.4	-10.0	+18.6	-5.8	20.2	-4.0	280MF, 35V 60V SURGE	0.0033 MF, 200V	2,100MF, 35V 60V SURGE	047	L113	36972 or 36973	2.2K	1.2K 2W	0.22 ±5%, 5W	1.5K	1.8K
LM-B12	12±5%	2.5	2.3	2.1	1.3	-12.0	+20.3	-8.8	22.8	-4.8	280MF, 35V 60V SURGE	0.0033 MF, 200V	2,100MF, 35V 60V SURGE	047	L113	36972 or 36973	2.2K	1.8K	0.22 ±5%, 5W	1.5K	1.8K
LM-B15	15±5%	2.2	2.0	1.8	1.3	-15.0	+20.2	-8.8	25.6	-6.0	280MF, 35V 60V SURGE	0.0033 MF, 200V	2,100MF, 35V 60V SURGE	047	L113	36973	2.2K	1.8K	0.39 ±5%, 3W	2.7K	1.8K
LM-B18	18±5%	2.0	1.8	1.7	1.3	-18.0	+20.4	-12.3	27.1	-2.7	280MF, 35V 60V SURGE	0.0033 MF, 200V	2,100MF, 35V 60V SURGE	047	L113	36220	2.2K	2.5K	0.39 ±5%, 3W	2.7K	6.8K
LM-B20	20±5%	1.8	1.6	1.5	1.2	-20.0	+20.5	-12.3	28.6	-3.0	280MF, 60V 100V SURGE	0.0033 MF, 200V	2,100MF, 35V 60V SURGE	047	L109	36220	2.2K	2.5K	0.39 ±5%, 3W	2.7K	6.8K
LM-B24	24±5%	1.4	1.3	1.2	1.1	-24.0	+27.1	-18.0	36.2	-3.6	160MF, 60V 100V SURGE	0.0033 MF, 200V	1,120MF, 60V 100V SURGE	036	L109	36220	2.2K	3.6K	0.56 ±5%, 3W	2.7K	6.8K
LM-B28	28±5%	1.3	1.2	1.1	1.0	-28.0	+29.7	-22.5	40.8	-4.2	160MF, 60V 100V SURGE	0.0033 MF, 200V	1,120MF, 60V 100V SURGE	036	L109	36487	2.2K	4.5K	0.56 ±5%, 3W	3.9K	6.8K
LM-B36	36±5%	1.1	1.0	0.90	0.85	-36.0	+34.1	-28.5	49.6	-3.9	160MF, 60V 100V SURGE	0.0033 MF, 200V	1,120MF, 60V 100V SURGE	036	L108	36487	3.3K	5.6K	0.56 ±5%, 3W	3.9K	10.0K
LM-B48	48±5%	0.90	0.85	0.80	0.75	-48.0	+51.0	-40.0	70.0	-5.2	90MF, 85V 100V SURGE	0.001 MF, 200V	400MF, 100V 150V SURGE	036	L108	35902 or 36487	3.3K	8.0K	0.56 ±5%, 3W	820	10.0K
LM-B60	60±5%	0.70	0.65	0.60	0.54	-60.0	+44.0	-50.0	75.0	-4.5	90MF, 85V 100V SURGE	0.018 MF, 200V	400MF, 100V 150V SURGE	036	L108	35902	4.5K	10.0K 5W	1.0 ±5%, 3W	1.0K	15.0K ±2%, 1/2W

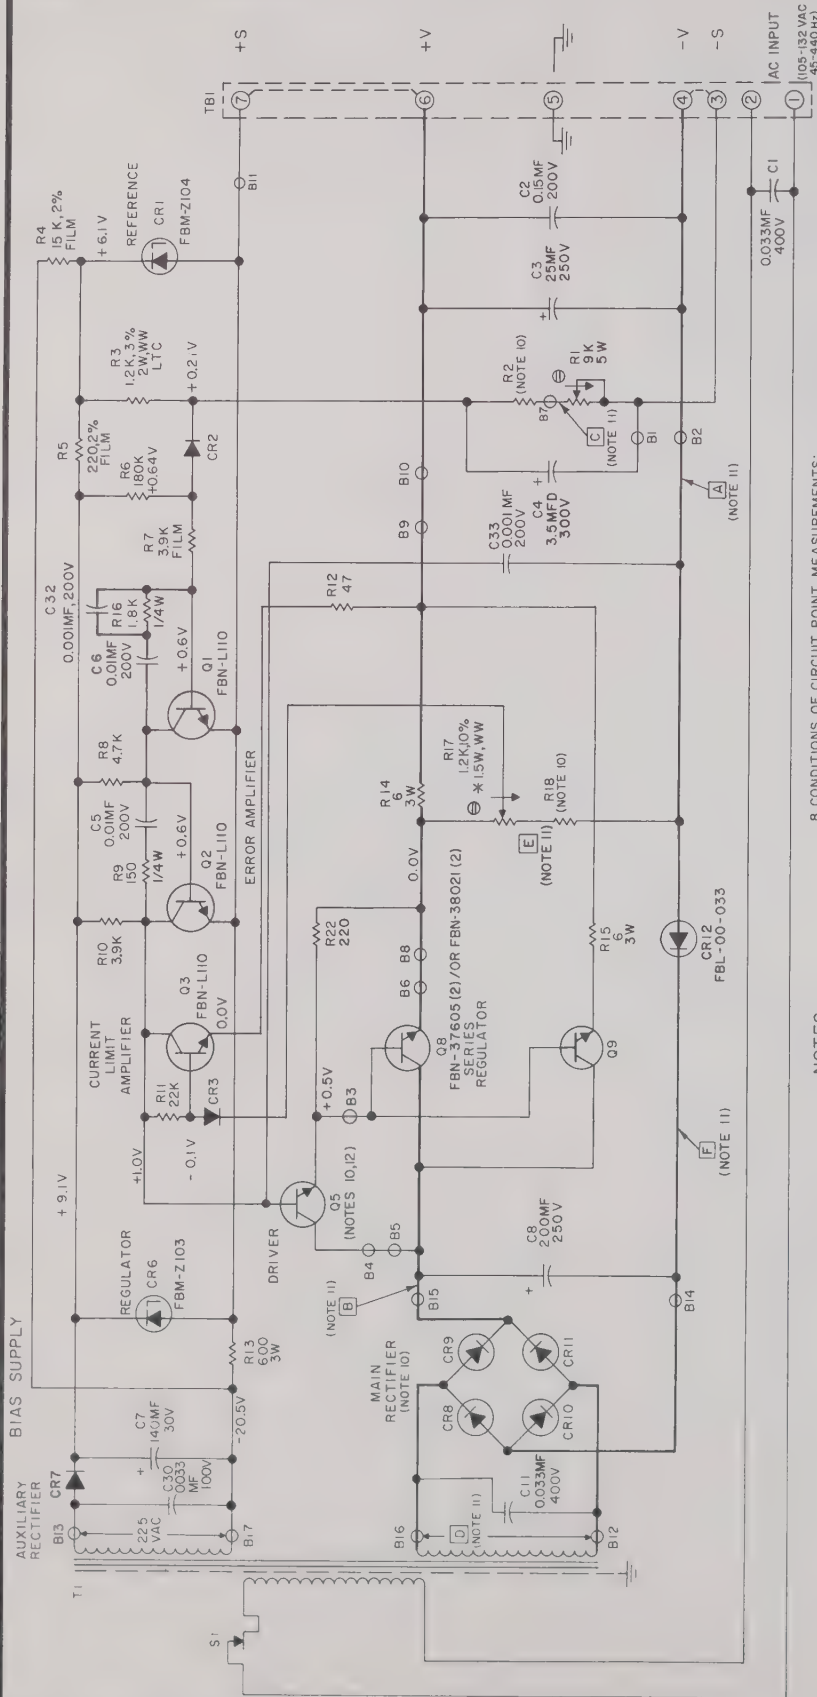

NOTES

- RESISTOR VALUES ARE IN OHMS.
- RESISTOR WATTAGE 1/2 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED.
- RESISTOR TOLERANCES: COMP. $\pm 10\%$; WIREWOUND $\pm 5\%$; FILM $\pm 5\%$; UNLESS OTHERWISE NOTED.
- CAPACITOR TOLERANCES: ELECTROLYTIC -10% $+100\%$; MYLAR $\pm 10\%$; UNLESS OTHERWISE NOTED.
- SYMBOLS:
 - ↑ INDICATES CLOCKWISE ROTATION OF SHAFT.
 - ⊗ INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
 - ⊙ INDICATES CONNECTION TO CHASSIS.
 - INDICATES ACTUAL UNIT MARKING
 - * SEE INSTRUCTION MANUAL.
 - LAMBDA PT. # FBL-00-030; USE IN4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
 - INDICATES TERMINAL ON PRINTED WIRING BOARD "B".
- DESIGNATIONS ARE LAMBDA PART NUMBERS.
- DERATE CURRENT 10% FOR 45-55 Hz. FOR 360-440 Hz SEE INSTRUCTION MANUAL.

- CONDITIONS OF CIRCUIT POINT MEASUREMENTS:
INPUT: 115 VAC, 60 CPS; OUTPUT: NOM'L. VDC, NO LOAD
INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE
DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS
TAKEN WITH 20,000 OHMS/V. VOLTMETER BETWEEN
+S (TERM. 7) & INDICATED POINTS UNLESS NOTED.
- COAT BOTH SIDES OF INSULATING WAFER WITH DOW
CORNING NO. 340 SILICONE GREASE.
- SEE TABLE I FOR COMPONENT VALUES.
- SEE TABLE I FOR VOLTAGE VALUES.
- IF Q5 IS REPLACED, ALWAYS RETAIN
RADIATOR AND INSTALL WITH NEW
TRANSISTOR.

FOR WIRING OF POWER SUPPLY
TO LOAD REFER TO SUPPLY-
TO-LOAD WIRING DIAGRAMS.
DOTTED CONNECTIONS SHOWN ON
TBI INDICATE JUMPERS IN PLACE
FOR LOCAL SENSING CONNECTION.

THIS SCHEMATIC APPLIES TO UNITS
BEARING SERIAL NO. PREFIXES A-D

SCHEMATIC DIAGRAM REGULATED POWER SUPPLY

REFERENCE DESIGNATIONS NOT USED	Q6	C9	Q7	C10	Q4	C12/C29	C31	R19	R21	CR4.5

MODELS
-M-B100
LM-B120
LM-B150


LAMBDA ELECTRONICS CORP.
MELVILLE NEW YORK



TABLE I

DATA REFERENCES FOR MODELS LM-B100, LM-B120 AND LM-B150

Model	Voltage Range (VDC)	Max. Current (Amps)				Schematic Voltage Measurement						Schematic Components				
		40°C	50°C	60°C	71°C	A (VDC)	B (VDC)	C (VDC)	D (VAC)	E (VDC)	F (VDC)	CR8-11 (FBL 00-)	Q5 (FBN-)	R2 ±3%, 5W	R18 ±5%	
LM-B100	100±5%	0.37	0.34	0.30	0.28	-100	+71	-80	122	-3.0	-100.6	033	L108	16K	39K, 1/2W	
LM-B120	120±5%	0.30	0.28	0.25	0.23	-120	+79	-100	142	-3.1	-120.6	033	L108	20K	43K, 1/2W	
LM-B150	150±5%	0.25	0.23	0.20	0.19	-150	+92	-130	171	-3.2	-150.6	064	L115	26K	56K, 1W	

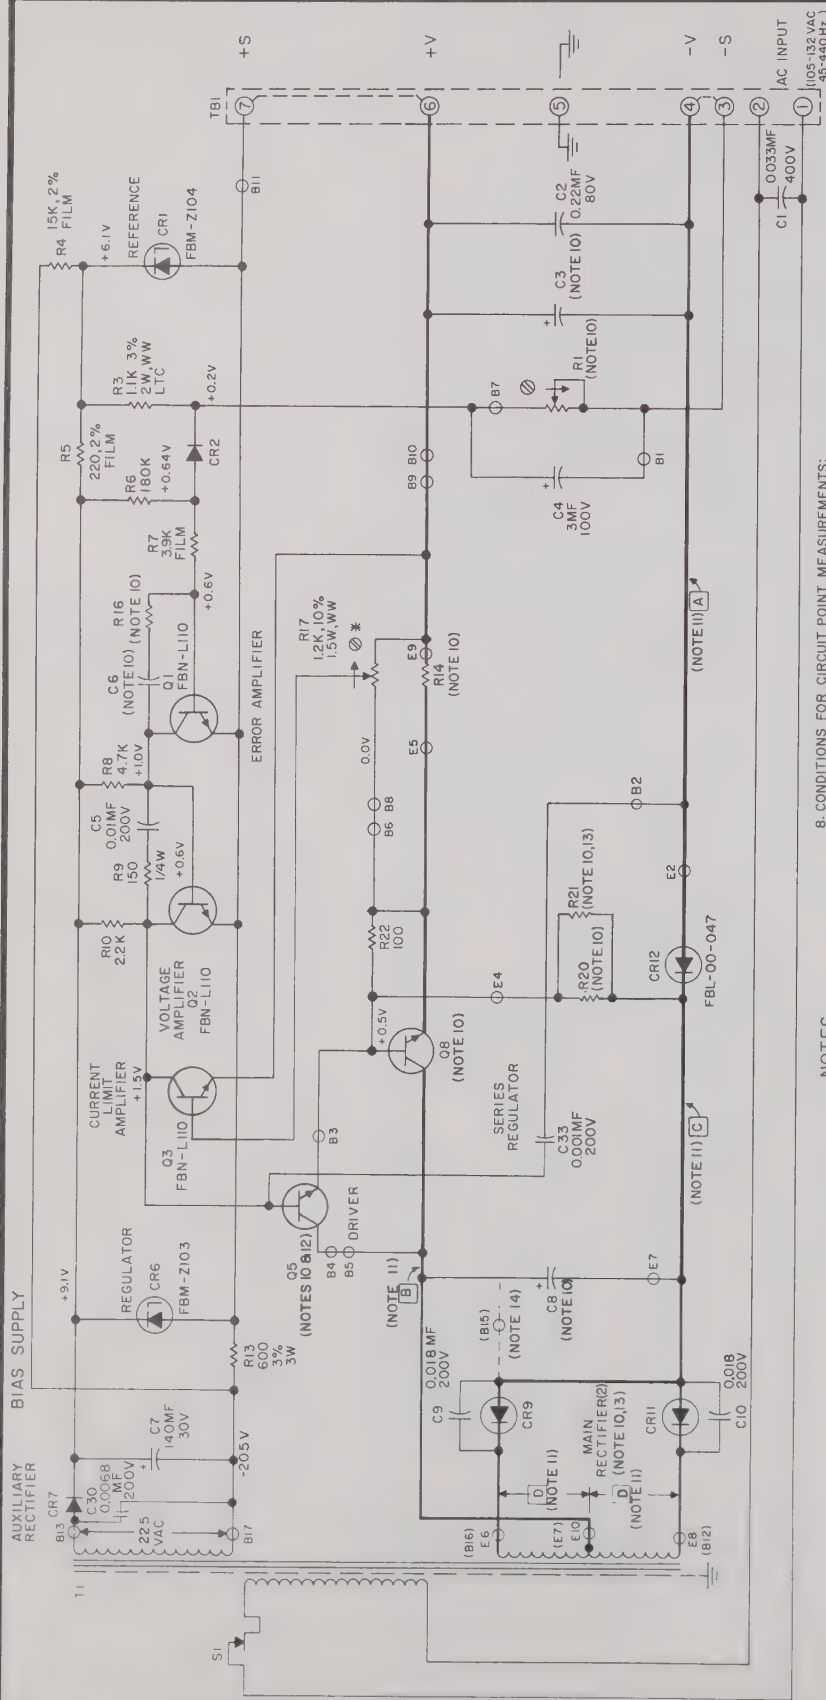

NOTES

1. RESISTOR VALUES ARE IN OHMS.
2. RESISTOR WATTAGE 1/2 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED.
3. RESISTOR TOLERANCES: COMP $\pm 10\%$; WIREWOUND $\pm 5\%$; FILM $\pm 5\%$; UNLESS OTHERWISE NOTED.
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10% , $+100\%$; MYLAR $\pm 10\%$; UNLESS OTHERWISE NOTED.
5. SYMBOLS:
 - ⬆ INDICATES COUNTERCLOCKWISE ROTATION OF SHAFT.
 - ⊗ INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
 - ⬆ INDICATES CONNECTION TO CHASSIS.
 - INDICATES ACTUAL UNIT MARKING
 - ⬆ INDICATES INSTRUCTION MANUAL.
 - ⬆ LAMBDA PT. #FBL-00-030; USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
 - ⬆ INDICATES TERMINAL ON PRINTED WIRING BOARD "B", BOARD "E".


6. DESIGNATIONS ARE LAMBDA PART NUMBERS.
7. DERATE CURRENT 10% FOR 45-55Hz, FOR 360-440Hz SEE INSTRUCTION MANUAL.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS:
 - INPUT: 115VAC, 60Hz; OUTPUT: NOML VDC, NO LOAD.
 - INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM 7) B INDICATED POINTS UNLESS NOTED.
 - 9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
 - 10. SEE TABLE I FOR COMPONENT VALUES.
 - 11. IF Q5 IS REPLACED, ALWAYS RETAIN RADIATOR & INSTALL WITH NEW TRANSISTOR.
 - 12. ON MODEL LMB-O-32, CR9 & CR11 ARE CONNECTED SO THAT POLARITY IS OPPOSITE TO THAT SHOWN. 8 XFMR CTR.TAP CONNECTS TO MINUS LEG CATHODES OF CR9 & CR11 CONNECT TO PLUS LEGS, R21 USED.
 - 14. -G (B16), (E7), (B12) AND (B15) USED FOR MODEL LMB-O-32 ONLY.

REFERENCE DESIGNATIONS NOT USED	CR10	R2
	Q4	R11,12
	Q6,Q7	
	CR4	R18/9
	CR8	R21
	CR3	
	CR5	

TABLE I
DATA REFERENCES FOR MODELS LMB-0-7.
LMB-0-14 AND LMB-0-32

Model	Voltage Range (VDC)	Max. Current (Amps)				Schematic Voltage Measurement				Schematic Components									
		40°C	50°C	60°C	71°C	A (VDC)	B (VDC)	C (VDC)	D (VAC)	C3	C6	C8	CR9, 11 (FBL 00-)	Q5 (FBN-)	Q8 (FBN-)	R1 5%, 5W	R14	R16 10%, 1/2W	R20 R21*
LMB-0-7	0-7	2.8	2.6	2.3	1.5	-7.0	+10.5	-7.5	13.0	500MF, 20V 35V SURGE	0.01MF 200V	3600MF, 20V 35V SURGE	047	L113	36972	2,200	0.39 5%, 3W	820	820 10%, 1W
LMB-0-14	0-14	1.6	1.5	1.3	1.2	-14.0	+15.7	-14.5	21.8	280MF, 35V 60V SURGE	0.01MF 200V	2100MF, 35V 60V SURGE	047	L113	36972	3,300	0.56 5%, 3W	820	820 10%, 1W
LMB-0-32	0-32	0.80	0.70	0.60	0.50	-32.0	+21.0	-32.5	33.6	160MF, 60V 100V SURGE	0.018MF 200V	1100MF, 60V 100V SURGE	036	L109	36487	9,000	1.0 3%, 3W	1000	2000 5%, 3W

* R21 only used on Model LMB-0-32

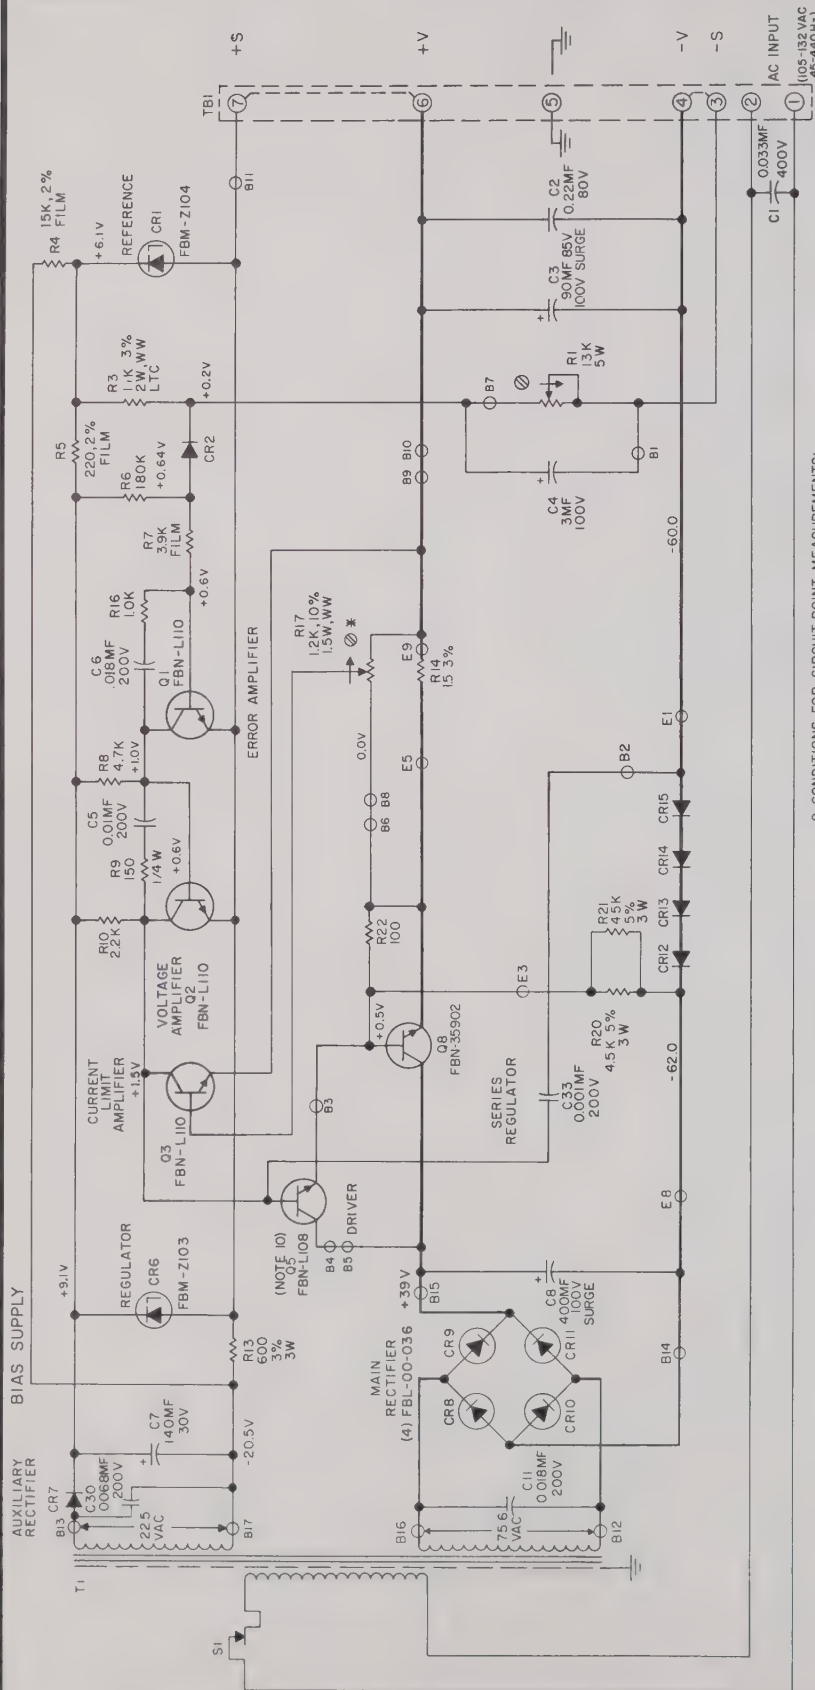

8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS:

- INPUT: 115VAC, 60 Hz. OUTPUT:
INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE
DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS
TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN
+S (TERM. 7) & INDICATED POINTS UNLESS NOTED.
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW
CORNING NO. 340 SILICONE GREASE.
10. IF Q5 IS REPLACED, ALWAYS RETAIN RADIATOR
AND INSTALL WITH NEW TRANSISTOR.

NOTES

1. RESISTOR VALUES ARE IN OHMS.
2. RESISTOR WATTAGE 1/2 WATT; RESISTORS ABOVE 2
WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED.
3. RESISTOR TOLERANCES: COMP. $\pm 10\%$; WIREWOUND $\pm 5\%$;
FILM $\pm 5\%$; UNLESS OTHERWISE NOTED.
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10% , $+100\%$;
MYLAR $\pm 10\%$; UNLESS OTHERWISE NOTED.
5. SYMBOLS:
 - ↑ INDICATES CLOCKWISE ROTATION OF SHAFT.
 - ⊗ INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
 - INDICATES CONNECTION TO CHASSIS.
 - * SEE INSTRUCTION MANUAL
 - Λ LAMBDA PT. #FBL-00-030; USE IN 4002 DIODE
FOR REPLACEMENT UNLESS OTHERWISE NOTED.
 - INDICATES TERMINAL ON PRINTED WIRING
BOARD "B", BOARD "E"
6. DESIGNATIONS ARE LAMBDA PART NUMBERS.
7. DERATE CURRENT 10% FOR 45-55 Hz FOR
350-440 Hz SEE INSTRUCTION MANUAL.

REFERENCE DESIGNATIONS NOT USED
Q4
Q7
Q8
Q9
Q10
Q11
Q12
Q13
Q14
Q15


RATING TABLE	
AMP	MAX TEMP
1.0	40 °C
1.5	50 °C
2.0	60 °C
2.5	71 °C

FOR WIRING OF POWER SUPPLY
CIRCUITS SEE WIRING DIAGRAMS.
DOTTED CONNECTIONS SHOWN ON
INDICATE JUMPERS IN PLACE
FOR LOCAL SENSING CONNECTION.

THIS SCHEMATIC APPLIES TO UNITS
BEARING SERIAL NO. PREFIX

SCHEMATIC DIAGRAM
REGULATED POWER SUPPLY
MODEL LMB-0-60 0-60VDC

LAMBDA ELECTRONICS CORP.
NEW YORK
A **Veeco** SUBSIDIARY

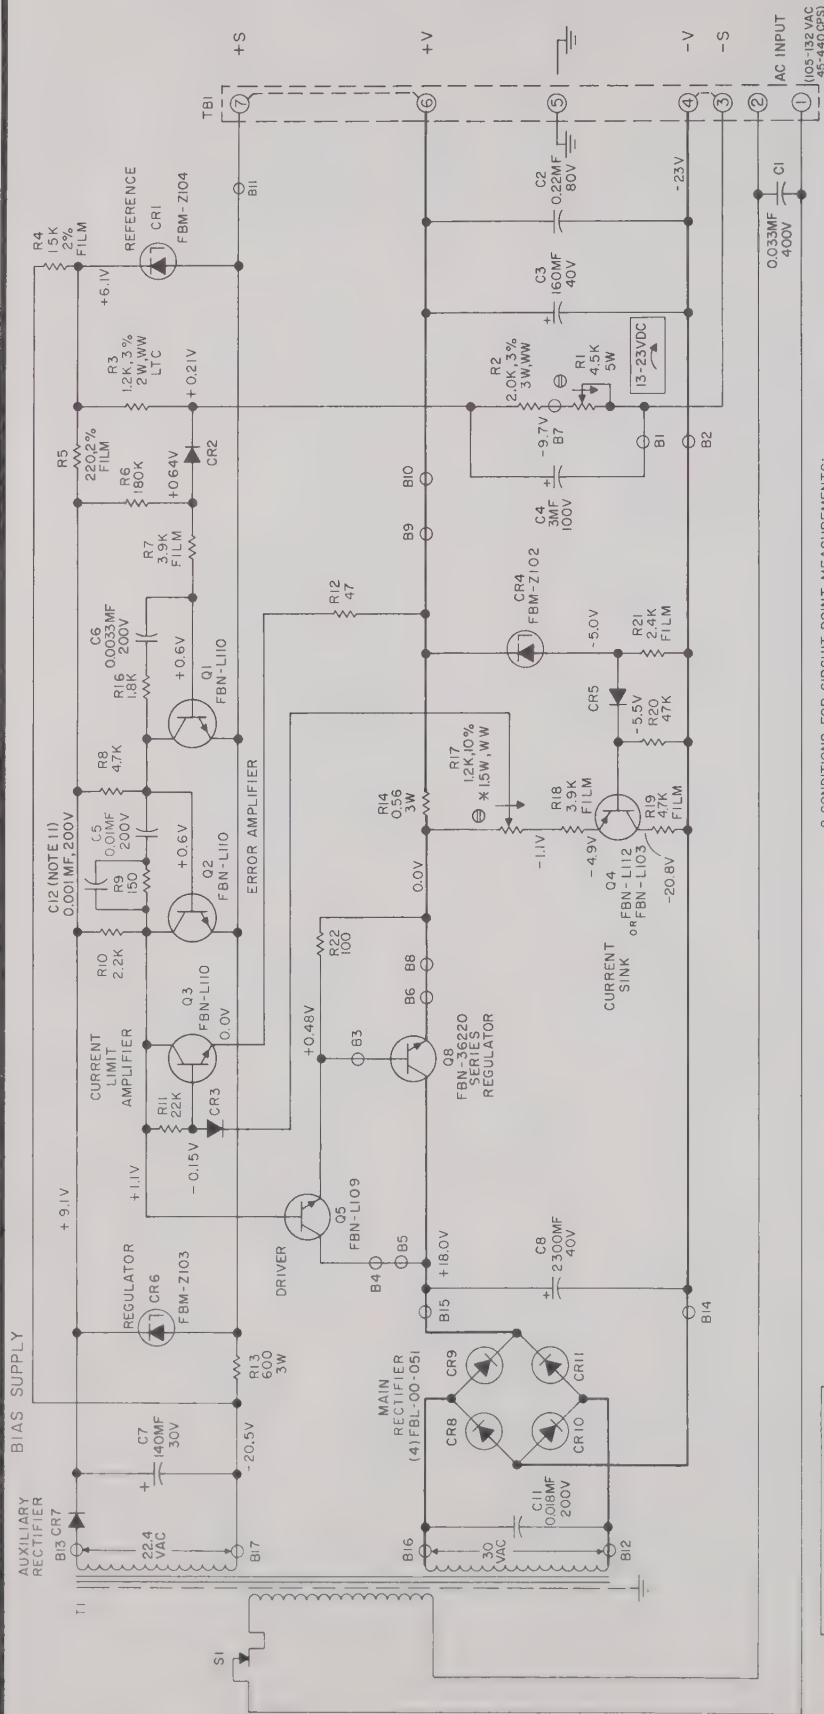

CAUTION
NOT AT CHASSIS GROUND POTENTIAL
DO NOT SHORT TO CHASSIS GROUND

(NOTE 9)

INSULATING
WAFER

CHASSIS
GROUND

COLLECTOR
(CASE)

TRANSISTOR
PIN VIEW

TRANSISTOR
BOTTOM VIEW

TYPICAL
Q1, 2, 3

TYPICAL
Q4, 5, 6, 7, 8, 9, 10, 11

TYPICAL
Q12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100

TYPICAL
Q1, 2, 3

TYPICAL
Q4, 5, 6, 7, 8, 9, 10, 11

TYPICAL
Q12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100

TYPICAL
Q1, 2, 3

TYPICAL
Q4, 5, 6, 7, 8, 9, 10, 11

TYPICAL
Q12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100

TYPICAL
Q1, 2, 3

TYPICAL
Q4, 5, 6, 7, 8, 9, 10, 11

TYPICAL
Q12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100

TYPICAL
Q1, 2, 3

TYPICAL
Q4, 5, 6, 7, 8, 9, 10, 11

TYPICAL
Q12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100

NOTES

1. RESISTOR VALUES ARE IN OHMS.
2. RESISTOR WATTAGE 1/2 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED.
3. RESISTOR TOLERANCES: COMP. $\pm 10\%$; WIREWOUND $\pm 5\%$; FILM $\pm 5\%$; UNLESS OTHERWISE NOTED.
4. CAPACITOR TOLERANCES: ELECTROLYTIC $\pm 10\%$; $\pm 100\%$; MYLAR $\pm 10\%$; UNLESS OTHERWISE NOTED.
5. SYMBOLS:
 - ↑ INDICATES COUNTERCLOCKWISE ROTATION OF SHAFT.
 - ⊗ INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
 - ⊙ INDICATES CONNECTION TO CHASSIS.
 - INDICATES ACTUAL UNIT MARKING.
 - * LAMBDA PT. #FBL-00-030; USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
 - INDICATES TERMINAL ON PRINTED WIRING BOARD "B".
6. DESIGNATIONS ARE LAMBDA PART NUMBERS.
7. DERATE CURRENT 10% FOR 45-55 CPS OR 360-440 CPS.

8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS:

- INPUT: 115VAC, 60CPS; OUTPUT: 23VDC, NO LOAD.
- INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED.
- 9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
- 10. R10 WAS 3.9K AND R11 WAS 6.8K ON UNITS WITH SERIAL PREFIX "A".
- 11. C12 NOT USED ON UNITS WITH SERIAL NO. PREFIXES A-C.

REFERENCE DESIGNATIONS NOT USED
Q6
Q7
R15
C9
C10

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO SUPPLY-10-LOAD WIRING DIAGRAMS.

DOTTED CONNECTIONS SHOWN ON TBI INDICATE JUMPERS IN PLACE FOR LOCAL SENSING CONNECTION.

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES A-D

SCHEMATIC DIAGRAM
REGULATED POWER SUPPLY


MODEL LM218, 13-23VDC



LAMBDA
ELECTRONICS CORP.
MELVILLE
NEW YORK

RATING TABLE	
AMB. TEMP.	MAX. LOAD
40°C	1.5A
50°C	1.3A
60°C	1.2A
71°C	1.0A

(SEE NOTE 7)

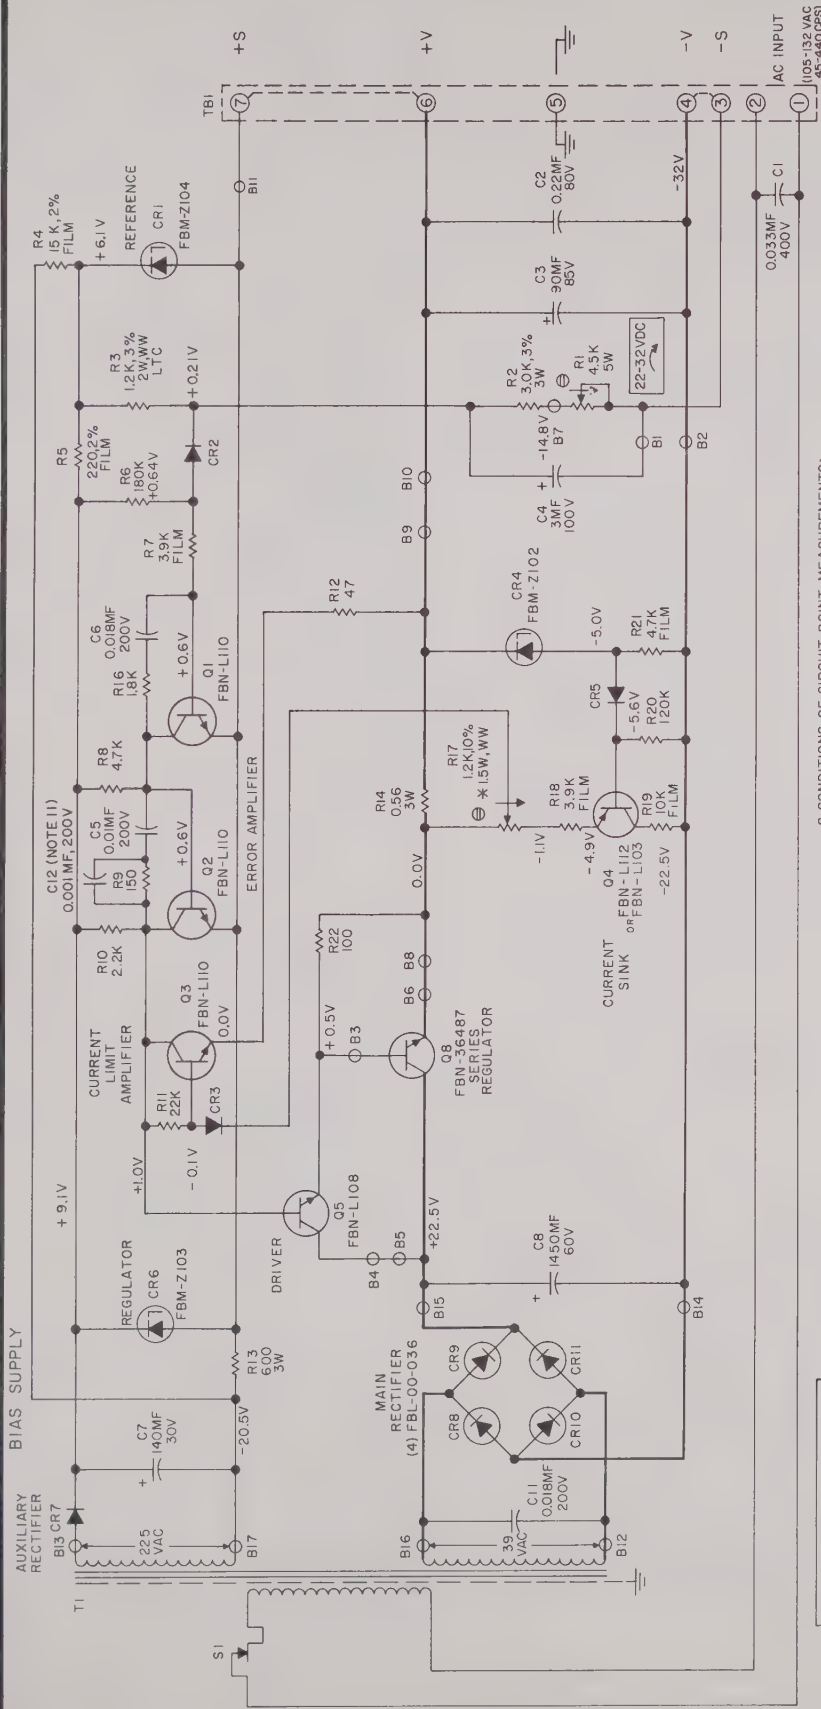

CAUTION
NOT AT CHASSIS GROUND POTENTIAL
DO NOT SHORT TO CHASSIS GROUND.

(NOTE 9)
INSULATING
WAFER

CHASSIS
GROUND

COLLECTOR
(CASE)

TRANSISTOR
PIN VIEW
Q8

TRANSISTOR
TYPICAL
CR2, 3, 5, 7, CR8, 9, 10, 11
FBL-00-030
(SEE NOTE 8)

TRANSISTOR
TYPICAL
CR1, 4, 5
FBL-00-030
(SEE NOTE 8)

TRANSISTOR
TYPICAL
CR1, 4, 5
FBL-00-030
(SEE NOTE 8)

TRANSISTOR
TYPICAL
CR1, 4, 5
FBL-00-030
(SEE NOTE 8)

TRANSISTOR
TYPICAL
CR1, 4, 5
FBL-00-030
(SEE NOTE 8)

TRANSISTOR
TYPICAL
CR1, 4, 5
FBL-00-030
(SEE NOTE 8)

NOTES

- RESISTOR VALUES ARE IN OHMS.
- RESISTOR WATTAGE 1/2 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED.
- RESISTOR TOLERANCES: COMP. $\pm 10\%$; WIREWOUND $\pm 5\%$; FILM $\pm 5\%$; UNLESS OTHERWISE NOTED.
- CAPACITOR TOLERANCES: ELECTROLYTIC $\pm 10\%$, $\pm 100\%$; MYLAR $\pm 10\%$; UNLESS OTHERWISE NOTED.
- SYMBOLS:
 - INDICATES CLOCKWISE ROTATION OF SHAFT.
 - INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
 - INDICATES CONNECTION TO CHASSIS.
 - INDICATES ACTUAL UNIT MARKING.
 - LAMBDA PT. # FBL-00-030; USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
 - INDICATES TERMINAL ON PRINTED WIRING BOARD "B".
- DESIGNATIONS ARE LAMBDA PART NUMBERS.
- DERATE CURRENT 10% FOR 45-55 CPS OR 360-440 CPS.

- CONDITIONS OF CIRCUIT POINT MEASUREMENTS:
INPUT: 115 VAC, 60 CPS; OUTPUT: 32 VDC, NO LOAD.
INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED.
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
10. R10 WAS 3.9K AND R11 WAS 6.8K ON UNITS WITH SERIAL NO. PREFIX 'A'.
- C12 NOT USED ON UNITS WITH SERIAL NO. PREFIX A-C.

REFERENCE DESIGNATIONS NOT USED	Q6	C9	Q7	C10	R15

RATING TABLE	AMB. TEMP.	MAX. LOAD
	40°C	1.2A
	50°C	1.1A
	60°C	1.0A
	71°C	0.8A


(SEE NOTE 7)

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO SUPPLY-TO-LOAD WIRING DIAGRAMS. DOTTED CONNECTIONS SHOWN ON TBI INDICATE JUMPERS IN PLACE FOR LOCAL SENSING CONNECTION.

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES A-D
SCHEMATIC DIAGRAM
REGULATED POWER SUPPLY
MODEL LM219, 22-32VDC

LAMBDA
ELECTRONICS CORP.
MELVILLE
NEW YORK

BIAS SUPPLY

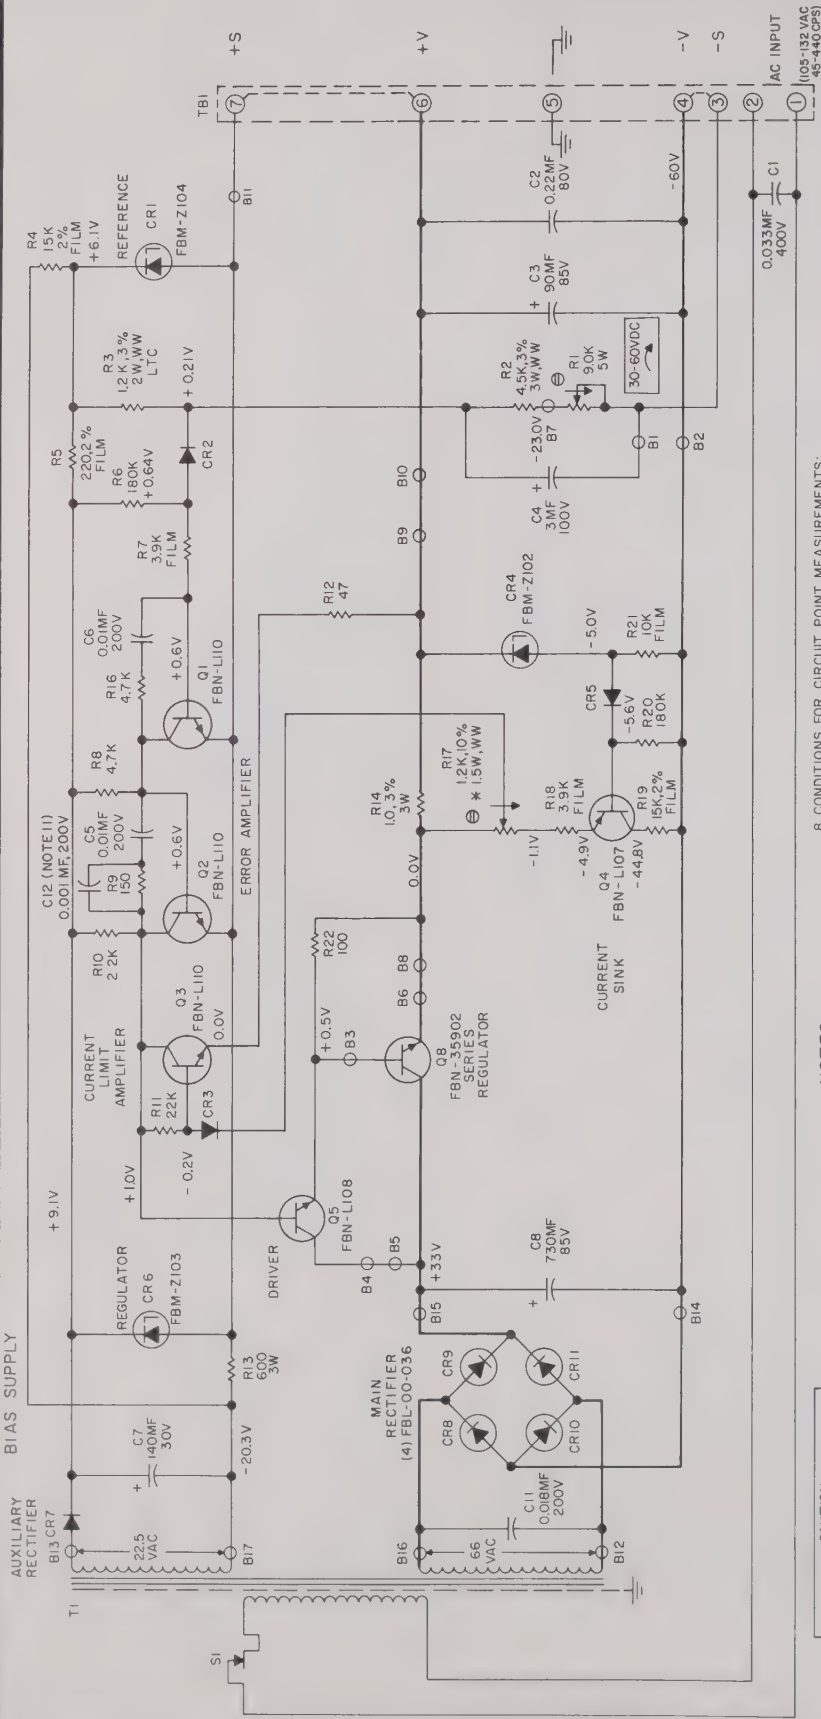

NOTES

1. RESISTOR VALUES ARE IN OHMS.
2. RESISTOR WATTAGE 1/2 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED.
3. RESISTOR TOLERANCES: COMP. $\pm 10\%$; WIREWOUND $\pm 5\%$; FILM $\pm 5\%$; UNLESS OTHERWISE NOTED.
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10% $+100\%$; MYLAR $\pm 10\%$; UNLESS OTHERWISE NOTED.
5. SYMBOLS:
 - ↑ INDICATES COUNTERCLOCKWISE ROTATION OF SHAFT.
 - ⊗ INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
 - INDICATES CONNECTION TO CHASSIS.
 - ★ SEE INSTRUCTION MANUAL.
 - ◆ LAMBDA PT. #FBL-00-030; USE IN4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
 - ⊖ BOARD "B".
6. DESIGNATIONS ARE LAMBDA PART NUMBERS.
7. DERATE CURRENT 10% FOR 45-55 CPS OR 360-440 CPS.

8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS:
INPUT: 115VAC, 60CPS; OUTPUT: 60VDC, NO LOAD.
INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED.
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
10. R10 WAS 3.9K AND R11 WAS 6.8K ON UNITS WITH SERIAL NO. PREFIX 'A'.
11. C12 NOT USED ON UNITS WITH SERIAL NO. PREFIX A-C.

REFERENCE DESIGNATIONS NOT USED	
Q6	
Q7	
Q15	
C9	
C10	

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO SUPPLY-10- LOAD WIRING DIAGRAMS.

DOTTED CONNECTIONS SHOWN ON TBI INDICATE JUMPERS IN PLACE FOR LOCAL SENSING CONNECTION.

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES A-D

SCHEMATIC DIAGRAM
REGULATED POWER SUPPLY

MODEL LM220, 30 - 60VDC

RATING TABLE	
AMB. TEMP.	MAX.
LOAD	40°C 0.70A
50°C 0.65A	
60°C 0.60A	
71°C 0.45A	

(SEE NOTE 7)

LAMBDA
ELECTRONICS CORP.
MELVILLE
NEW YORK

CAUTION
NOT AT CHASSIS GROUND POTENTIAL
DO NOT SHORT TO CHASSIS GROUND

(NOTE 9)
INSULATING
WAFER

CHASSIS
GROUND

COLLECTOR
(CASE)

TRANSISTOR
PIN VIEW
Q8

TRANSISTOR
BOTTOM VIEW
TYPICAL
Q1, 2, 3

TRANSISTOR
BOTTOM VIEW
TYPICAL
Q4, 5

TYPICAL
CR2, 3, 7, 8, 9, 10, 11
FBL-00-030
(SEE NOTE 8)

TYPICAL
CR1, 4, 6



5-Year Guarantee

We warrant each instrument manufactured by us, and sold by us or our authorized agents, to be free from defects in material and workmanship, and that it will perform within applicable specifications for a period of five years after original shipment. Our obligation under this guarantee is limited to repairing or replacing any instrument or part thereof, (except tubes and fuses) which shall, within five years after delivery to the original purchaser, be returned to us with transportation charges prepaid, prove after our examination to be thus defective.

We reserve the right to discontinue instruments without notice, and to make modifications in design at any time without incurring any obligation to make such modifications to instruments previously sold.

LAMBDA ELECTRONICS CORP.

515 BROAD HOLLOW ROAD • MELVILLE, L. I., NEW YORK • 516 MYRTLE 4-4200



SUBSIDIARY